



## ADRIA L2A

---

LED-5L06E300ZL11/093/L100 NB DALI 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ADRIA L2A

Product code: ADR50559

Type: LED-5L06E300ZL11/093/L100 NB DALI 4K#

Short description of the luminaire: Stainless steel brushed | pendant LED light DALI | TRIPLEX OPAL hand blown glass shade | steel wire pendant ( with supply cable) 100 cm |



## Technical data


|                           |                                |
|---------------------------|--------------------------------|
| Types of luminaires       | Dimmable                       |
| Mounting type             | Suspended - wire               |
| Base material             | stainless steel steel          |
| Shade material            | three-layer glass TRIPLEX OPAL |
| Base color                | brushed stainless steel        |
| Shade color               | white                          |
| Holding the shade         | steel holder                   |
| Mounting location         | ceiling                        |
| Width                     | 250 mm                         |
| Length                    | 250 mm                         |
| Height                    | 250 mm                         |
| Diameter                  | ø 250 mm                       |
| Suspension length         | 1000 mm                        |
| mounting holes (diameter) | none                           |
| Energy Class              | D                              |
| Impact strength           | IK01                           |
| Operating temperature     | from -20°C to +30°C            |

## Electrical data

|                                     |                   |
|-------------------------------------|-------------------|
| Power consumption                   | 14 W              |
| Ingress Protection                  | IP40              |
| Socket                              | LED modul         |
| terminal block                      | none              |
| Automatic circuit breaker type B10A | 41 pcs            |
| Automatic circuit breaker type B16A | 66 pcs            |
| Automatic circuit breaker type C10A | 66 pcs            |
| Automatic circuit breaker type C16A | 106 pcs           |
| Switching current                   | ≤ 7,5 A / 16 µsec |
| Number of LED drivers               | 1                 |

## Luminous data

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 2090 lm      |
| Lum. flux of light source   | 2380 lm      |
| Luminaire efficacy          | 149 lm/W     |
| Chromaticity temperature    | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

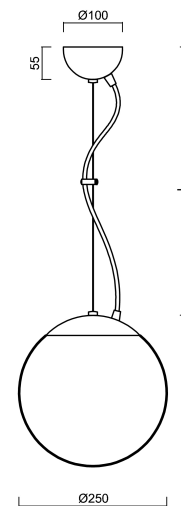

## TECHNICAL SHEET



*Eulum data for calculation programs are available at  
www.osmont.cz.*


### Logistical data

|           |               |
|-----------|---------------|
| EAN       | 8591728202507 |
| Warranty* | 60 months     |

*\*The warranty for the batteries is valid for 36 months from the date of purchase.*

### Additional assortment:

#### Lampshade

| Product code | Name | Color | Picture   | Drawing |
|--------------|------|-------|---|---------|
| 20208        | 093  | white |  |         |