



## ADRIA L4

---

LED-5L07E900ZL11/098/L100/NK1W NB 4K##



[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ADRIA L4

Product code: ADR60810

Type: LED-5L07E900ZL11/098/L100/NK1W NB 4K##

Short description of the luminaire: Stainless steel brushed | pendant LED light with emergency backup combined | TRIPLEX OPAL hand blown glass shade | steel wire pendant ( with supply cable) 100 cm |

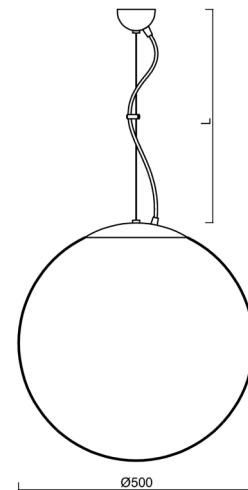

## Technical

Types of luminaires	Emergency combined
Mounting type	Suspended - wire
Base material	stainless steel steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	brushed stainless steel
Shade color	white
Holding the shade	folding system
Mounting location	ceiling
Width	500 mm
Length	500 mm
Height	500 mm
Diameter	ø 500 mm
Hinge length	1000 mm
mounting holes (diameter)	none
Cable entrance	none
Energy Class	D
Impact strength	IK01
Operating temperature	from 0°C to +30°C

## Electric

Power consumption	41 W
Ingress Protection	IP40
Socket	LED modul
Battery type	NiCd
Emergency time	3 hours
SELFTEST	no
terminal block	none
Automatic circuit breaker type B10A	25 pcs
Automatic circuit breaker type B16A	43 pcs
Automatic circuit breaker type C10A	29 pcs
Automatic circuit breaker type C16A	52 pcs

## Luminous

Lum. flux of luminaire	6120 lm
Lum. flux of light source	6960 lm
Lum. flux of light source in emergency mode	150 lm
Luminaire efficacy	149 lm/W
Temperature	4000 K



## TECHNICAL SHEET



Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

*Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).*

## Logistic

EAN	8591728054250
Weight NTTO	5.8 Kg
Weight BTTO	7.32 Kg
Number of cartons	2 pcs
Package volume	0.148 m <sup>3</sup>
Package 1 width	0.52 m
Package 1 length	0.52 m
Package 1 height	0.53 m
Warranty*	60 months

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

## Additional assortment:

### Lampshade

Product code	Name	Color	Description	Picture	Drawing
20041	098	white	příslušenství	