



## ADRIA P4 HP

LED-5L08E950Z11/098/a4 NK3HST NL 3K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

## ADRIA P4 HP

Product code: ADR62333

Type: LED-5L08E950Z11/098/a4 NK3HST NL 3K##

Short description of the luminaire: Stainless steel polished | pendant high-power LED light with emergency backup combined (with Self-test) | TRIPLEX OPAL hand blown glass shade | rod pendant 80 cm |

### Technical

|                           |                                |
|---------------------------|--------------------------------|
| Types of luminaires       | Emergency combined SELFTEST    |
| Mounting type             | Suspended - rod                |
| Base material             | stainless steel steel          |
| Shade material            | three-layer glass TRIPLEX OPAL |
| Base color                | polished stainless steel       |
| Shade color               | white                          |
| Holding the shade         | steel holder                   |
| Mounting location         | ceiling                        |
| Width                     | 500 mm                         |
| Length                    | 500 mm                         |
| Height                    | 500 mm                         |
| Hinge length              | 800 mm                         |
| mounting holes (diameter) | 3xØ5mm                         |
| Cable entrance            | 2xØ16mm                        |
| Energy Class              | D                              |
| Impact strength           | IK01                           |
| Operating temperature     | from -20°C to +30°C            |



### Electric

|                    |                     |
|--------------------|---------------------|
| Power consumption  | 59 W                |
| Ingress Protection | IP40                |
| Socket             | LED modul           |
| Battery type       | LiFePO4             |
| Emergency time     | 3 hours             |
| SELFTEST           | yes                 |
| terminal block     | snap terminal block |

### Luminous

|                                             |              |
|---------------------------------------------|--------------|
| Lum. flux of luminaire                      | 8100 lm      |
| Lum. flux of light source                   | 9200 lm      |
| Lum. flux of light source in emergency mode | 200 lm       |
| Temperature                                 | 3000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI                                         | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

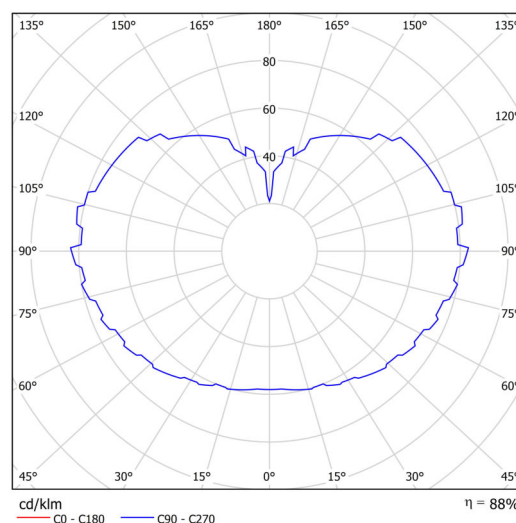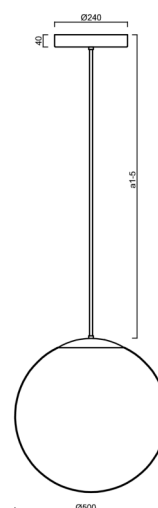


# Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728146887        |
| Weight NTTO       | 7.3 Kg               |
| Weight BTTO       | 9.1 Kg               |
| Number of cartons | 2 pcs                |
| Package volume    | 0.157 m <sup>3</sup> |
| Package 1 width   | 0.52 m               |
| Package 1 length  | 0.52 m               |
| Package 1 height  | 0.53 m               |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.

## Installation dimensions:

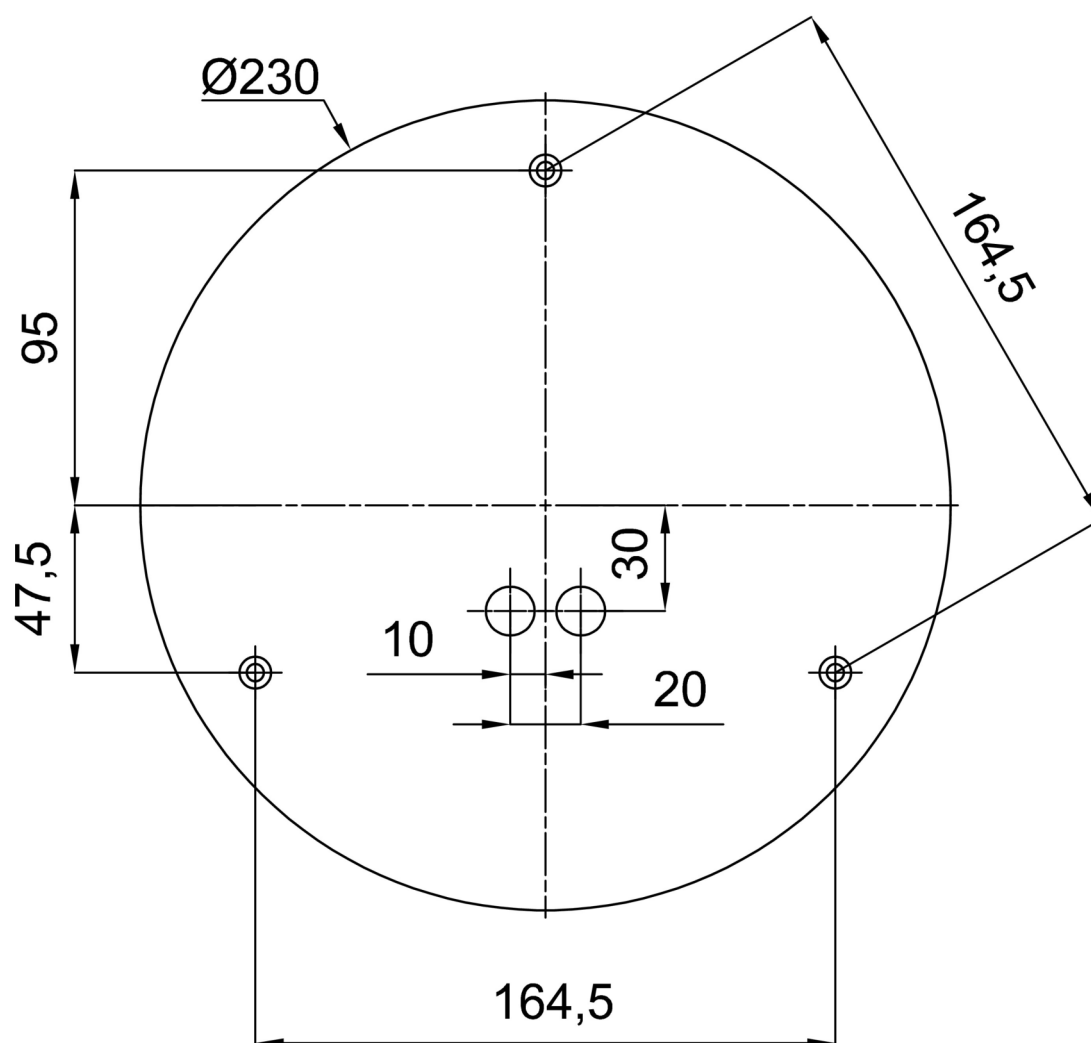

## Additional assortment:

## Lampshade

| Product code | Name | Color | Description   | Picture                                                                             | Drawing |
|--------------|------|-------|---------------|-------------------------------------------------------------------------------------|---------|
| 20041        | 098  | white | příslušenství |  |         |