



## ADRIA S2A

---

LED-5L06E300ZS11/093/L100 MS 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ADRIA S2A

Product code: ADR50564

Type: LED-5L06E300ZS11/093/L100 MS 4K#

Short description of the luminaire: Brass polished | pendant LED light ON/OFF | TRIPLEX OPAL hand blown glass shade| cable pendant ( with inner support wire) 100 cm |



## Technical data


|                           |                                |
|---------------------------|--------------------------------|
| Types of luminaires       | Classic on/off                 |
| Mounting type             | Suspended - cable              |
| Base material             | brass                          |
| Shade material            | three-layer glass TRIPLEX OPAL |
| Base color                | polished brass                 |
| Shade color               | white                          |
| Holding the shade         | steel holder                   |
| Mounting location         | ceiling                        |
| Width                     | 250 mm                         |
| Length                    | 250 mm                         |
| Height                    | 250 mm                         |
| Diameter                  | ø 250 mm                       |
| Suspension length         | 1000 mm                        |
| mounting holes (diameter) | none                           |
| Energy Class              | D                              |
| Impact strength           | IK01                           |
| Operating temperature     | from -20°C to +30°C            |

## Electrical data

|                                     |           |
|-------------------------------------|-----------|
| Power consumption                   | 14 W      |
| Ingress Protection                  | IP40      |
| Socket                              | LED modul |
| terminal block                      | none      |
| Automatic circuit breaker type B10A | 72 pcs    |
| Automatic circuit breaker type B16A | 116 pcs   |
| Automatic circuit breaker type C10A | 72 pcs    |
| Automatic circuit breaker type C16A | 116 pcs   |
| Number of LED drivers               | 1         |

## Luminous data

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 2090 lm      |
| Lum. flux of light source   | 2380 lm      |
| Luminaire efficacy          | 149 lm/W     |
| Chromaticity temperature    | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

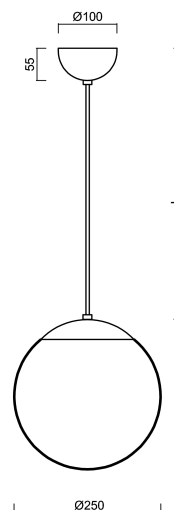

Eulum data for calculation programs are available at

OSMONT, s.r.o.  
HYBRÁLEC 129,  
586 01 JIHLAVA, CZ


Logistical data

|           |               |
|-----------|---------------|
| EAN       | 8591728202552 |
| Warranty* | 60 months     |

*\*The warranty for the batteries is valid for 36 months from the date of purchase.*

Additional assortment:

Lampshade

| Product code | Name | Color | Picture   | Drawing |
|--------------|------|-------|---|---------|
| 20208        | 093  | white |  |         |