



## ARAKIS 2

---

LED-1L14EMP700K64/416 NK3HST HF 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ARAKIS 2

Product code: ARA68001


Type: LED-1L14EMP700K64/416 NK3HST HF 4K#

Short description of the luminaire: White colour | ceiling or wall LED light with emergency backup combined ( with Self-test) with HF sensor |TRIPLEX OPAL hand blown glass shade|



## Technical

|                           |                                |
|---------------------------|--------------------------------|
| Types of luminaires       | Emergency combined + sensor    |
| Mounting type             | surface mounted                |
| Base material             | steel                          |
| Shade material            | three-layer glass TRIPLEX OPAL |
| Base color                | white Ral9003                  |
| Shade color               | white                          |
| Holding the shade         | folding system                 |
| Mounting location         | ceiling/wall                   |
| Width                     | 350 mm                         |
| Length                    | 350 mm                         |
| Height                    | 135 mm                         |
| mounting holes (diameter) | 4xØ5mm                         |
| Cable entrance            | 2xØ16mm                        |
| Energy Class              | D                              |
| Impact strength           | IK01                           |
| Operating temperature     | from -20°C to +30°C            |

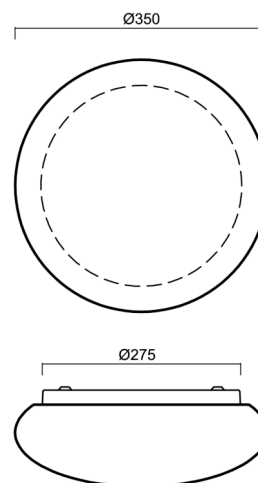


## Electric

|                    |                     |
|--------------------|---------------------|
| Power consumption  | 18 W                |
| Ingress Protection | IP43                |
| Socket             | LED modul           |
| Battery type       | LiFePO4             |
| Emergency time     | 3 hours             |
| SELFTEST           | yes                 |
| terminal block     | snap terminal block |

## Luminous

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 2080 lm      |
| Lum. flux of light source                   | 2810 lm      |
| Lum. flux of light source in emergency mode | 200 lm       |
| Temperature                                 | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

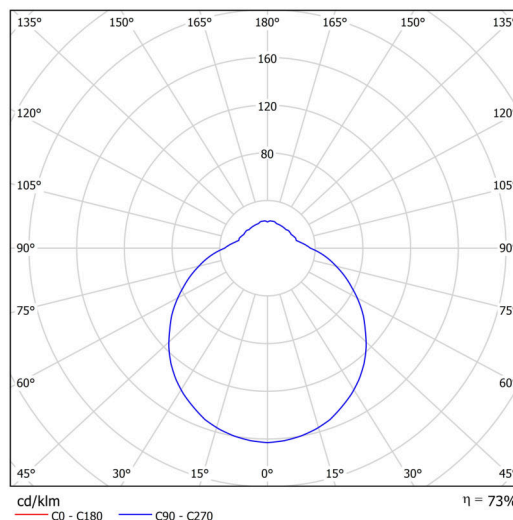

Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728148881        |
| Weight NTTO       | 2.9 Kg               |
| Weight BTTO       | 3.2 Kg               |
| Number of cartons | 1 pcs                |
| Package volume    | 0.019 m <sup>3</sup> |
| Package 1 width   | 0.36 m               |
| Package 1 length  | 0.35 m               |
| Package 1 height  | 0.15 m               |
| Warranty*         | 60 months            |




\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:




## Additional assortment:

## Decorative collar

| Product code | Name     | Color                    | Description   | Picture  | Drawing |
|--------------|----------|--------------------------|---------------|--|---------|
| 30128        | K63/DL15 | brushed stainless steel  | příslušenství |  |         |
| 30127        | K63/DL14 | polished stainless steel | příslušenství |  |         |
| 30126        | K63/DL4  | white Ral9003            | příslušenství |  |         |

## Lampshade

| Product code | Name | Color | Description   | Picture  | Drawing |
|--------------|------|-------|---------------|--|---------|
| 20126        | 416  | white | příslušenství |  |         |