



AURA 4

LED-1L15E500K74/072 HF 4K#


WWW.OSMONT.CZ

AURA 4

Product code: AUR59522


Type: LED-1L15E500K74/072 HF 4K#

Short description of the luminaire: White surface-mounted LED light with sensor with TRIPLEX OPAL glass shade.



Technical

| | |
|------------------------------|--------------------------------|
| Types of luminaires | Sensor |
| Mounting type | surface mounted |
| Base material | steel |
| Shade material | three-layer glass TRIPLEX OPAL |
| Base color | white Ral9003 |
| Shade color | white |
| Holding the shade | folding system |
| Mounting location | ceiling/wall |
| Width | 420 mm |
| Length | 420 mm |
| Height | 125 mm |
| Diameter | ø 420 mm |
| mounting holes (diameter) | 4xø5mm |
| Installation wire (diameter) | 2xø16mm |
| Energy Class | D |
| Impact strength | IK01 |
| Operating temperature | from -20°C to +30°C |

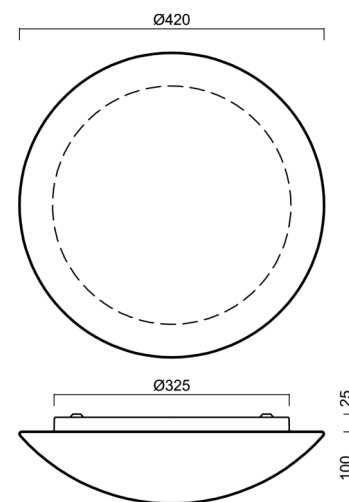


Electric

| | |
|-------------------------------------|---------------------|
| Power consumption | 19 W |
| Ingress Protection | IP43 |
| Socket | LED modul |
| Sensor | HF |
| terminal block | snap terminal block |
| Automatic circuit breaker type B10A | 37 pcs |
| Automatic circuit breaker type B16A | 59 pcs |
| Automatic circuit breaker type C10A | 37 pcs |
| Automatic circuit breaker type C16A | 59 pcs |

Luminous


| | |
|-----------------------------|--------------|
| Lum. flux of luminaire | 2320 lm |
| Lum. flux of light source | 3130 lm |
| Luminaire efficacy | 122 lm/W |
| Temperature | 4000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

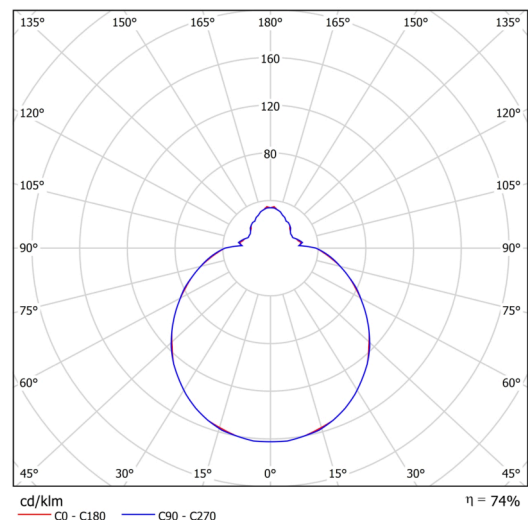


Eulum data for calculation programs are available at www.osmont.cz.

Additional assortment:

Decorative collar

| Product code | Name | Color | Description | Picture | Drawing |
|--------------|----------|--------------------------|--------------------------------|--|---------|
| 30131 | K74/DL15 | brushed stainless steel | the collar is held by the base |  | |
| 30130 | K74/DL14 | polished stainless steel | the collar is held by the base |  | |
| 30129 | K74/DL4 | white Ral9003 | the collar is held by the base |  | |

Lampshade

| Product code | Name | Color | Description | Picture | Drawing |
|--------------|------|-------|-------------|--|---------|
| 20004 | 072 | white | |  | |