



AURA V10

LED-1L15E350BTv14/014/NK1W HF 4K#


WWW.OSMONT.CZ

AURA V10

Product code: AUR68600

Type: LED-1L15E350BTV14/014/NK1W HF 4K#

Short description of the luminaire: White semi-recessed LED light with emergency unit combined with sensor with TRIPLEX OPAL glass shade.



Technical





Types of luminaires	Emergency combined + sensor
Mounting type	semi-recessed
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	360 mm
Length	360 mm
Height	104 mm
Diameter	ø 360 mm
mounting holes (diameter)	none
Installation wire (diameter)	2xØ16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C

Electric

Power consumption	13 W
Ingress Protection	IP44
Socket	LED modul
Sensor	HF
Battery type	NiCd
Emergency time	3 hours
terminal block	snap terminal block
Automatic circuit breaker type B10A	37 pcs
Automatic circuit breaker type B16A	58 pcs
Automatic circuit breaker type C10A	32 pcs
Automatic circuit breaker type C16A	50 pcs

Luminous

Lum. flux of luminaire	1440 lm
Lum. flux of light source	2220 lm
Lum. flux of light source in emergency mode	150 lm
Luminaire efficacy	110 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80

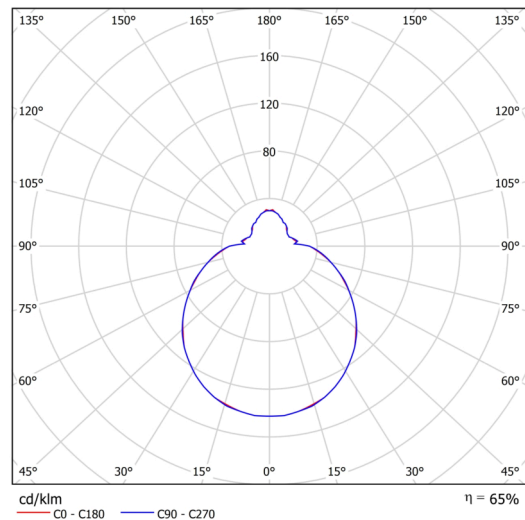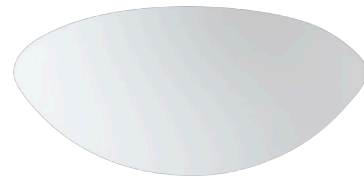

TECHNICAL SHEET

MacAdam	3
Blue light hazard	Risk group 0


Eulum data for calculation programs are available at www.osmont.cz.

Logistic

EAN	8591728070335
Weight NTTO	2.6 Kg
Weight BTTO	2.9 Kg
Number of cartons	1 pcs
Package volume	0.025 m ³
Package 1 width	0.37 m
Package 1 length	0.37 m
Package 1 height	0.18 m
Warranty*	60 months

*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

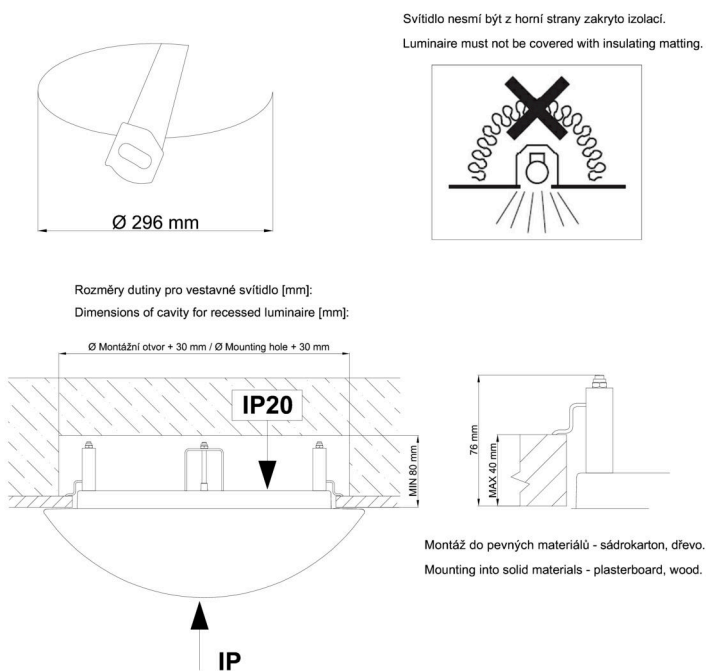

Additional assortment:

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20055	014	white		