



## DELIA 1

---

LED-1L14E500KN62/PC22 NK3HST HF 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# DELIA 1

Product code: DEL69932

Type: LED-1L14E500KN62/PC22 NK3HST HF 4K#

Short description of the luminaire: White colour | ceiling or wall LED light with emergency backup combined ( with Self-test) with HF sensor | opal polycarbonate shade (PC)



## Technical

|                           |                             |
|---------------------------|-----------------------------|
| Types of luminaires       | Emergency combined + sensor |
| Mounting type             | surface mounted             |
| Base material             | steel                       |
| Shade material            | opal polycarbonate          |
| Base color                | white Ral9003               |
| Shade color               | white                       |
| Holding the shade         | folding system              |
| Mounting location         | ceiling/wall                |
| Width                     | 300 mm                      |
| Length                    | 300 mm                      |
| Height                    | 75 mm                       |
| mounting holes (diameter) | 3xØ5mm                      |
| Cable entrance            | 2xØ16mm                     |
| Energy Class              | D                           |
| Impact strength           | IK10                        |
| Operating temperature     | from -20°C to +30°C         |




## Electric

|                    |                     |
|--------------------|---------------------|
| Power consumption  | 13 W                |
| Ingress Protection | IP54                |
| Socket             | LED modul           |
| Battery type       | LiFePO4             |
| Emergency time     | 3 hours             |
| SELFTEST           | yes                 |
| terminal block     | snap terminal block |

## Luminous

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 1540 lm      |
| Lum. flux of light source                   | 2080 lm      |
| Lum. flux of light source in emergency mode | 200 lm       |
| Temperature                                 | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

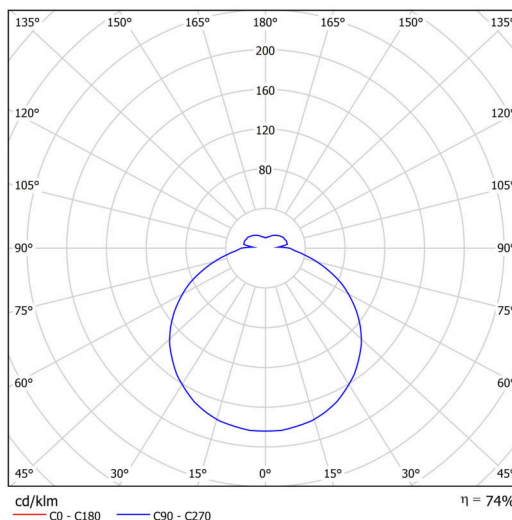

Logistic

|                   |                     |
|-------------------|---------------------|
| EAN               | 8591728149802       |
| Weight NTTO       | 1 Kg                |
| Weight BTTO       | 1.2 Kg              |
| Number of cartons | 1 pcs               |
| Package volume    | 0.01 m <sup>3</sup> |
| Package 1 width   | 0.31 m              |
| Package 1 length  | 0.31 m              |
| Package 1 height  | 0.1 m               |
| Warranty*         | 60 months           |

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:




Additional assortment:

Base for surface mounting

| Product code | Name      | Color            | Description   | Picture  | Drawing   |
|--------------|-----------|------------------|---------------|--|---|
| 33501        | KN6,K6/BP | white<br>Ra19003 | příslušenství |  |  |

Lampshade

| Product code | Name | Color | Description   | Picture  | Drawing |
|--------------|------|-------|---------------|--|---------|
| 20520        | PC22 | white | příslušenství |  |         |