



DELIA 3

LED-1L20E1050KN94/PC24 DALI 3/35/4K##


WWW.OSMONT.CZ

DELIA 3

Product code: DEL71499

Type: LED-1L20E1050KN94/PC24 DALI 3/35/4K##

Short description of the luminaire: White colour | ceiling or wall LED light DALI | opal polycarbonate shade (PC)



Technical data

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	steel
Shade material	opal polycarbonate
Base color	white Ral9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	500 mm
Length	500 mm
Height	85 mm
Diameter	ø 500 mm
mounting holes (diameter)	3xø5mm
Cable entrance	2xø16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C

Electrical data



Power consumption	48 W
Ingress Protection	IP54
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	14 pcs
Automatic circuit breaker type B16A	22 pcs
Automatic circuit breaker type C10A	23 pcs
Automatic circuit breaker type C16A	37 pcs
Switching current	22,5 A / 176 µsec
Number of LED drivers	1

Luminous data

Lum. flux of luminaire	5110/5330 lm
Lum. flux of light source	7740/8070 lm
Luminaire efficacy	106 lm/W
Chromaticity temperature	3000/3500/4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at www.osmont.cz.

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

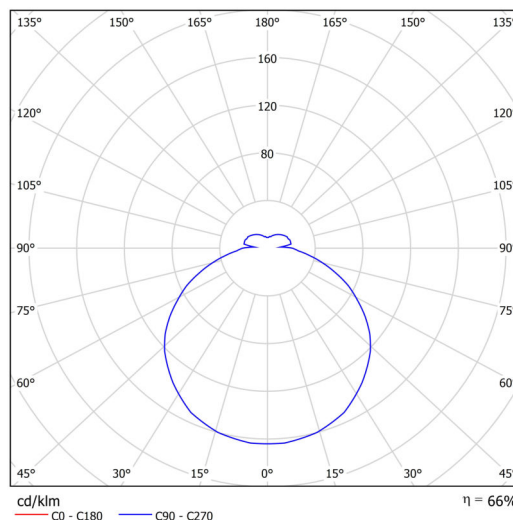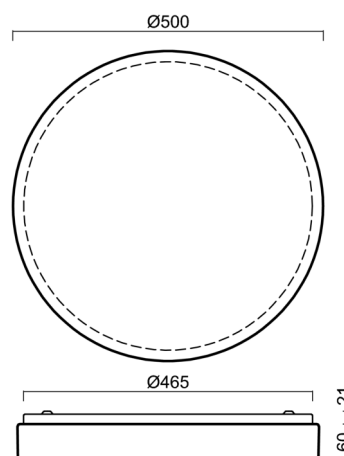


Logistical data

EAN	8591728239138
Weight NTTO	2.6 Kg
Weight BTTO	3.4 Kg
Number of cartons	1 pcs
Package volume	0.023 m ³
Package 1 width	0.5 m
Package 1 length	0.5 m
Package 1 height	0.09 m
Warranty*	60 months

*The warranty for the batteries is valid for 36 months from the date of purchase.

Installation dimensions:

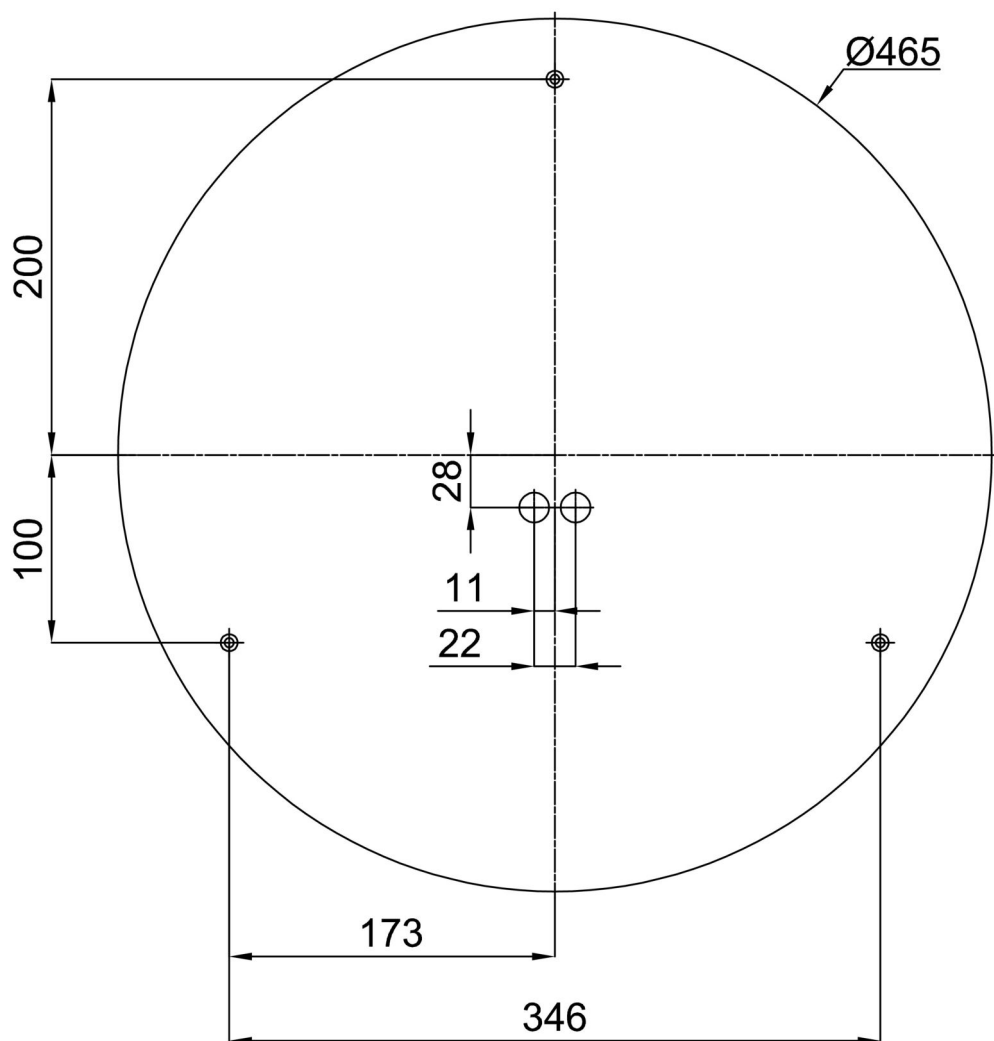

Additional assortment:

Base for surface mounting

Product code	Name	Color	Picture	Drawing
33503	KN9,K9/BP 2-1 B	white Ral9003		

Lampshade

Product code	Name	Color	Picture	Drawing
20524	PC24	white		