



## DELIA 4

---

LED-6L51EMP1050KN10/PM25 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# DELIA 4

Product code: DEL48728


Type: LED-6L51EMP1050KN10/PM25 4K##

Short description of the luminaire: White surface-mounted LED light ON/OFF and PMMA shade.



## Technical

|                              |                              |
|------------------------------|------------------------------|
| Types of luminaires          | Classic on/off               |
| Mounting type                | surface mounted              |
| Base material                | steel                        |
| Shade material               | opal polymethyl methacrylate |
| Base color                   | white Ra9003                 |
| Shade color                  | white                        |
| Holding the shade            | folding system               |
| Mounting location            | ceiling/wall                 |
| Width                        | 650 mm                       |
| Length                       | 650 mm                       |
| Height                       | 80 mm                        |
| Diameter                     | ø 650 mm                     |
| mounting holes (diameter)    | 3xø5mm                       |
| Installation wire (diameter) | 2xø16mm                      |
| Energy Class                 | D                            |
| Impact strength              | IK04                         |
| Operating temperature        | from -20°C to +30°C          |

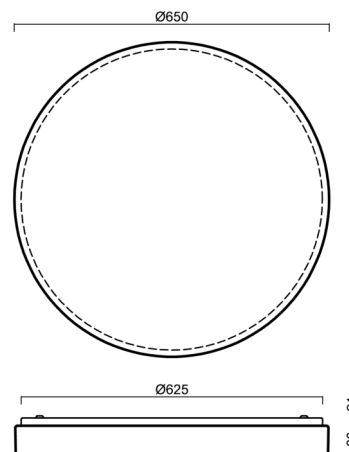


## Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 100 W               |
| Ingress Protection                  | IP54                |
| Socket                              | LED modul           |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 12 pcs              |
| Automatic circuit breaker type B16A | 20 pcs              |
| Automatic circuit breaker type C10A | 12 pcs              |
| Automatic circuit breaker type C16A | 20 pcs              |

## Luminous

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 10750 lm     |
| Lum. flux of light source   | 15810 lm     |
| Luminaire efficacy          | 107 lm/W     |
| Temperature                 | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

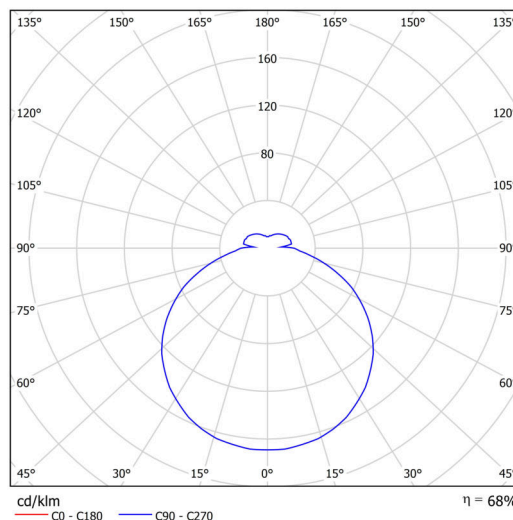

# TECHNICAL SHEET



## Multipower

Possibility of output adjustment by the user (DIP switch on the current source).


|        |      |     |     |     |  |
|--------|------|-----|-----|-----|--|
| I [mA] | 1050 | 900 | 850 | 700 |  |
| [%]    | 100  | 86  | 81  | 67  |  |

## Logistic

|                   |                     |
|-------------------|---------------------|
| EAN               | 8591728073008       |
| Weight NTTO       | 5.5 Kg              |
| Weight BTTO       | 6.9 Kg              |
| Number of cartons | 1 pcs               |
| Package volume    | 0.08 m <sup>3</sup> |
| Package 1 width   | 0.68 m              |
| Package 1 length  | 0.69 m              |
| Package 1 height  | 0.17 m              |
| Warranty*         | 60 months           |


\*The warranty for the batteries is valid for 12 months from the date of purchase.

## Installation dimensions:

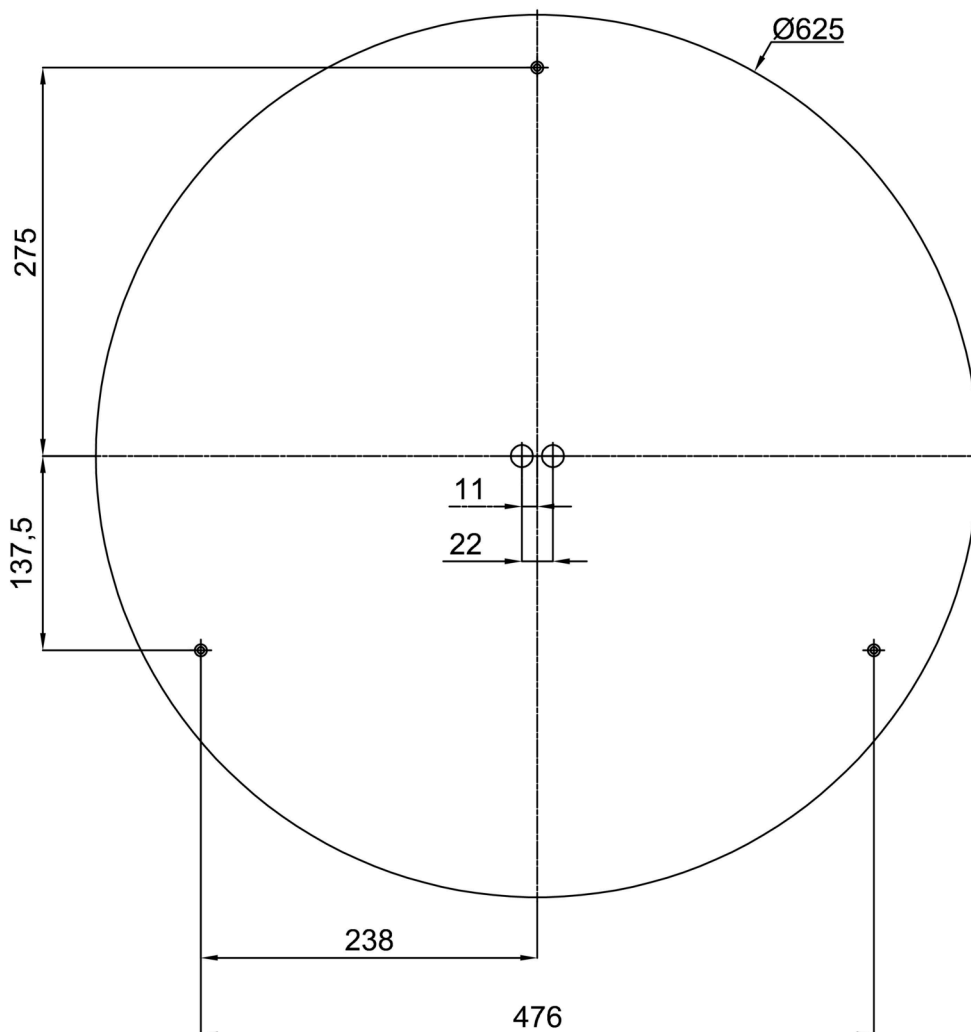

Additional assortment:

Lampshade

| Product code | Name | Color | Description | Picture                                                                            | Drawing |
|--------------|------|-------|-------------|------------------------------------------------------------------------------------|---------|
| 20535        | PM25 | white |             |  |         |