



## DELIA 5

---

LED-9L52EMP1050KN11/PC26 NK3HST 3K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# DELIA 5

Product code: DEL58802


Type: LED-9L52EMP1050KN11/PC26 NK3HST 3K##

Short description of the luminaire: White colour | ceiling or wall LED light with emergency backup combined ( with Self-test) | multipower driver | opal polycarbonate shade (PC)|



## Technical data

|                           |                             |
|---------------------------|-----------------------------|
| Types of luminaires       | Emergency combined SELFTEST |
| Mounting type             | surface mounted             |
| Base material             | steel                       |
| Shade material            | opal polycarbonate          |
| Base color                | white Ral9003               |
| Shade color               | white                       |
| Holding the shade         | folding system              |
| Mounting location         | ceiling/wall                |
| Width                     | 900 mm                      |
| Length                    | 900 mm                      |
| Height                    | 86 mm                       |
| Diameter                  | ø 900 mm                    |
| mounting holes (diameter) | 3xø5mm                      |
| Cable entrance            | 2xø16mm                     |
| Energy Class              | D                           |
| Impact strength           | IK10                        |
| Operating temperature     | from -20°C to +30°C         |

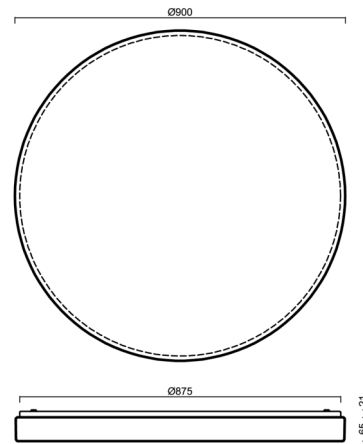


## Electrical data

|                    |                     |
|--------------------|---------------------|
| Power consumption  | 150 W               |
| Ingress Protection | IP54                |
| Socket             | LED modul           |
| Battery type       | LiFePO4             |
| Emergency time     | 3 hours             |
| SELFTEST           | yes                 |
| terminal block     | snap terminal block |

## Luminous data

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 15910 lm     |
| Lum. flux of light source                   | 22730 lm     |
| Lum. flux of light source in emergency mode | 200 lm       |
| Chromaticity temperature                    | 3000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

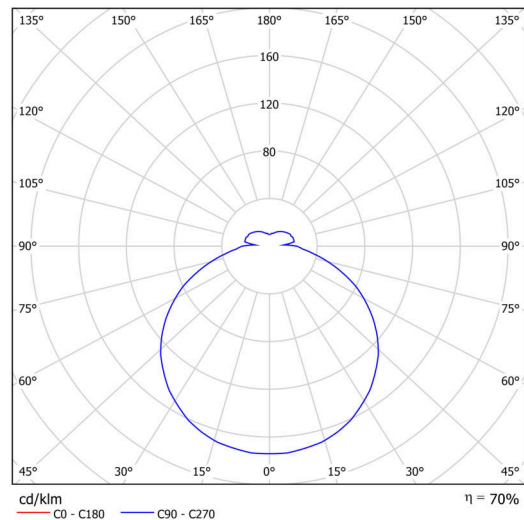

# TECHNICAL SHEET




## Logistical data

|                   |               |
|-------------------|---------------|
| EAN               | 8591728192952 |
| Weight NTTO       | 10 Kg         |
| Weight BTTO       | 12.7 Kg       |
| Number of cartons | 1 pcs         |
| Warranty*         | 60 months     |


\*The warranty for the batteries is valid for 36 months from the date of purchase.

## Installation dimensions:

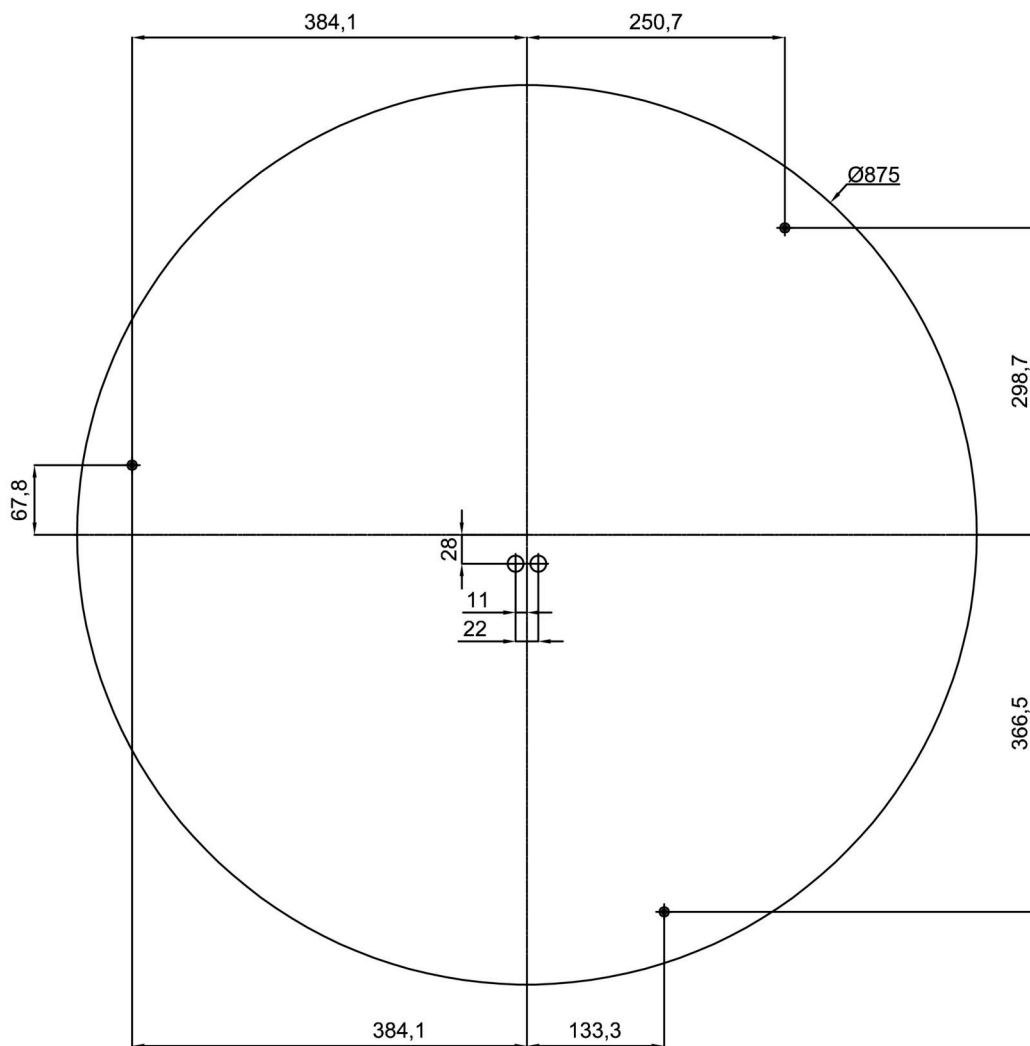

Additional assortment:

Lampshade

| Product code | Name | Color | Picture   | Drawing |
|--------------|------|-------|---|---------|
| 20655        | PC26 | white |  |         |