



## DELIA C4

---

LED-6L51E700KN10/PM25C DALI 3K##


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# DELIA C4

Product code: DEL69089


Type: LED-6L51E700KN10/PM25C DALI 3K##

Short description of the luminaire: White colour | ceiling or wall LED light DALI | PMMA shade with black decorative stripel



## Technical

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	steel
Shade material	opal polymethyl methacrylate
Base color	white Ra9003
Shade color	white - black
Holding the shade	folding system
Mounting location	ceiling/wall
Width	650 mm
Length	650 mm
Height	85 mm
Diameter	ø 650 mm
mounting holes (diameter)	3xø5mm
Cable entrance	2xø16mm
Energy Class	D
Impact strength	IK04
Operating temperature	from -20°C to +30°C

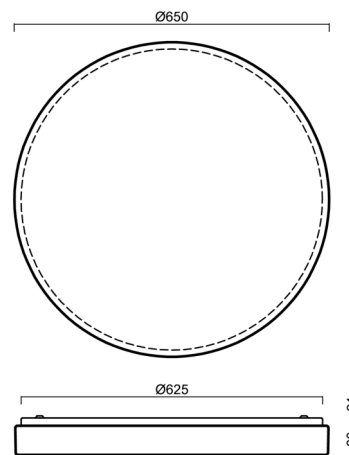


## Electric

Power consumption	65 W
Ingress Protection	IP54
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	9 pcs
Automatic circuit breaker type B16A	14 pcs
Automatic circuit breaker type C10A	15 pcs
Automatic circuit breaker type C16A	23 pcs

## Luminous

Lum. flux of luminaire	5790 lm
Lum. flux of light source	10520 lm
Luminaire efficacy	89 lm/W
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

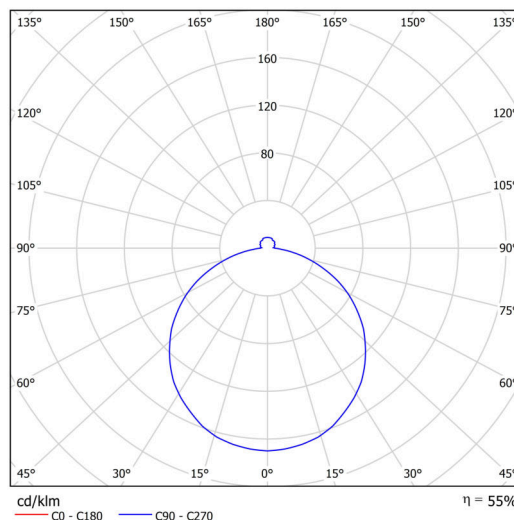


Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic

EAN	8591728077181
Weight NTTO	5.8 Kg
Weight BTTO	7.2 Kg
Number of cartons	1 pcs
Package volume	0.08 m <sup>3</sup>
Package 1 width	0.68 m
Package 1 length	0.17 m
Package 1 height	0.69 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

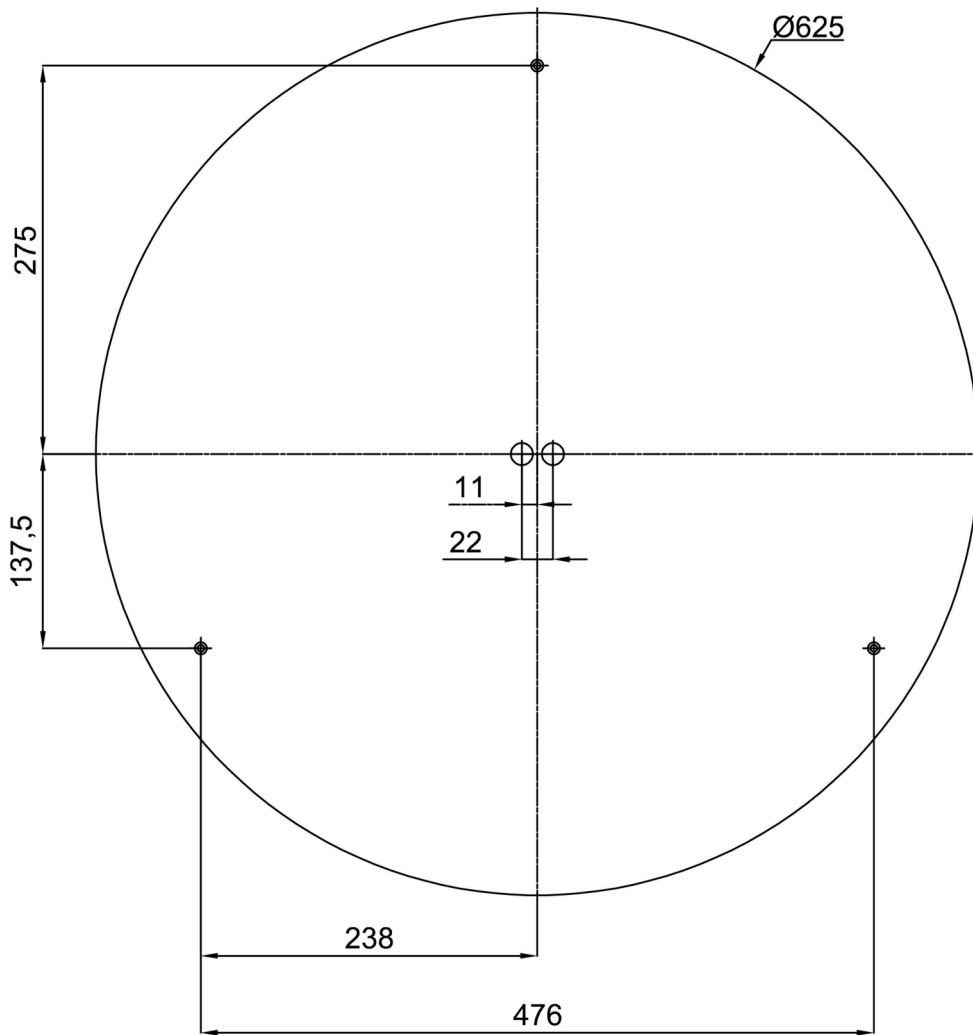

## Additional assortment:

## Lampshade

Product code	Name	Color	Description	Picture	Drawing
20573	PM25C	white - black	příslušenství		