



## DELIA CV2

---

LED-1L16EMP700KNV83/PC23C/NK1W HF 3K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# DELIA CV2

Product code: DEL69341

Type: LED-1L16EMP700KNV83/PC23C/NK1W HF 3K#

Short description of the luminaire: White semi-recessed LED light with emergency unit combined with sensor and polycarbonate shade.



## Technical




|                              |                             |
|------------------------------|-----------------------------|
| Types of luminaires          | Emergency combined + sensor |
| Mounting type                | semi-recessed               |
| Base material                | steel                       |
| Shade material               | opal polycarbonate          |
| Base color                   | white Ral9003               |
| Shade color                  | white - black               |
| Holding the shade            | folding system              |
| Mounting location            | ceiling/wall                |
| Width                        | 400 mm                      |
| Length                       | 400 mm                      |
| Height                       | 64 mm                       |
| Diameter                     | ø 400 mm                    |
| mounting holes (diameter)    | none                        |
| Installation wire (diameter) | 2xØ16mm                     |
| Energy Class                 | D                           |
| Impact strength              | IK10                        |

## Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 34 W                |
| Ingress Protection                  | IP44                |
| Socket                              | LED modul           |
| Sensor                              | HF                  |
| Battery type                        | NiCd                |
| Emergency time                      | 3 hours             |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 26 pcs              |
| Automatic circuit breaker type B16A | 40 pcs              |
| Automatic circuit breaker type C10A | 30 pcs              |
| Automatic circuit breaker type C16A | 48 pcs              |

## Luminous

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 2780 lm      |
| Lum. flux of light source                   | 5050 lm      |
| Lum. flux of light source in emergency mode | 150 lm       |
| Luminaire efficacy                          | 81 lm/W      |
| Temperature                                 | 3000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

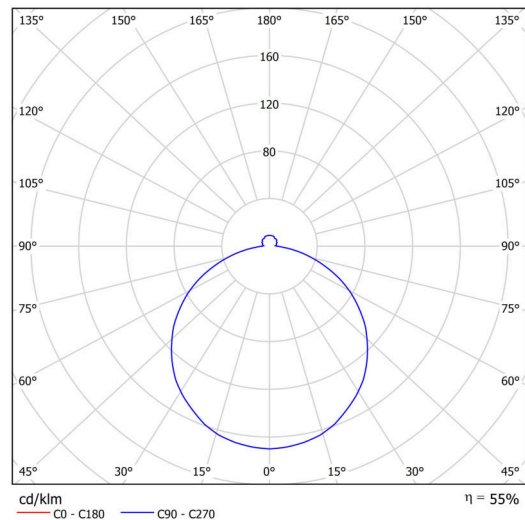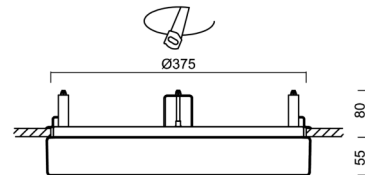

# TECHNICAL SHEET



Enum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

## Multipower

Possibility of output adjustment by the user (DIP switch on the current source).


|        |     |     |     |     |  |
|--------|-----|-----|-----|-----|--|
| I [mA] | 700 | 600 | 500 | 400 |  |
| [%]    | 100 | 86  | 71  | 57  |  |

## Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728077464        |
| Weight NTTO       | 2.6 Kg               |
| Weight BTTO       | 3 Kg                 |
| Number of cartons | 1 pcs                |
| Package volume    | 0.031 m <sup>3</sup> |
| Package 1 width   | 0.41 m               |
| Package 1 length  | 0.42 m               |
| Package 1 height  | 0.18 m               |
| Warranty*         | 60 months            |


\*The warranty for the batteries is valid for 12 months from the date of purchase.

## Installation dimensions:

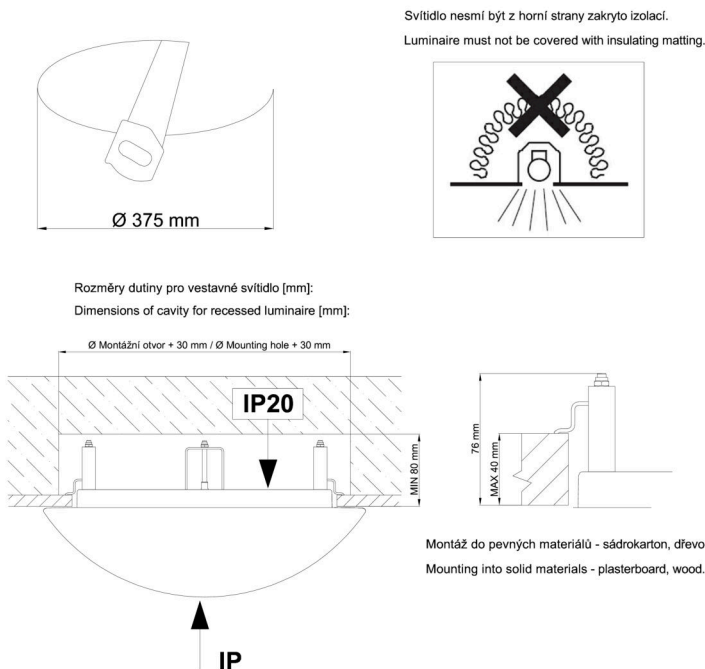

Additional assortment:

Lampshade

| Product code | Name  | Color         | Description | Picture  | Drawing |
|--------------|-------|---------------|-------------|--|---------|
| 20568        | PC23C | white - black |             |  |         |