



## DELIA CV2

---

LED-1L16E500KNV83/PM23C HF CORR 3K#


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# DELIA CV2

Product code: DEL69368

Type: LED-1L16E500KNV83/PM23C HF CORR 3K#

Short description of the luminaire: White semi-recessed LED light with CORRIDOR function and PMMA shade with black decorative stripe.



## Technical

|                              |                              |
|------------------------------|------------------------------|
| Types of luminaires          | Corridor                     |
| Mounting type                | semi-recessed                |
| Base material                | steel                        |
| Shade material               | opal polymethyl methacrylate |
| Base color                   | white Ral9003                |
| Shade color                  | white - black                |
| Holding the shade            | folding system               |
| Mounting location            | ceiling/wall                 |
| Width                        | 400 mm                       |
| Length                       | 400 mm                       |
| Height                       | 64 mm                        |
| Diameter                     | ø 400 mm                     |
| mounting holes (diameter)    | none                         |
| Installation wire (diameter) | 2xØ16mm                      |
| Energy Class                 | D                            |
| Impact strength              | IK04                         |




## Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 24 W                |
| Ingress Protection                  | IP44                |
| Socket                              | LED modul           |
| Sensor                              | HF                  |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 18 pcs              |
| Automatic circuit breaker type B16A | 28 pcs              |
| Automatic circuit breaker type C10A | 30 pcs              |
| Automatic circuit breaker type C16A | 46 pcs              |

## Luminous

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 2060 lm      |
| Lum. flux of light source   | 3750 lm      |
| Luminaire efficacy          | 85 lm/W      |
| Temperature                 | 3000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

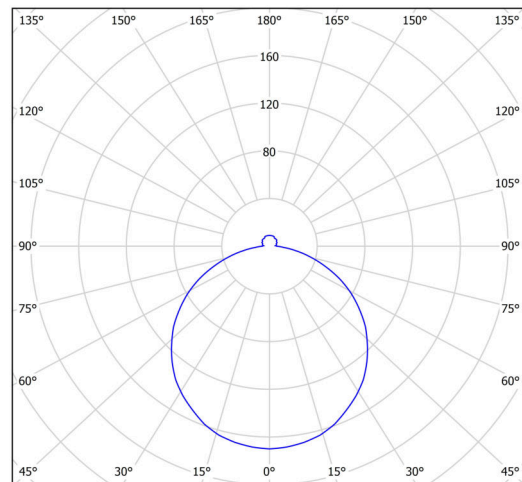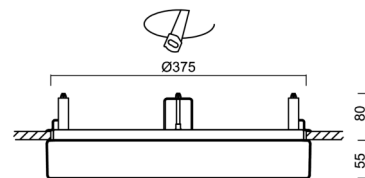


cd/klm — C0 - C180 — C90 - C270  $\eta = 55\%$

Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728077662        |
| Weight NTTO       | 2.2 Kg               |
| Weight BTTO       | 2.6 Kg               |
| Number of cartons | 1 pcs                |
| Package volume    | 0.031 m <sup>3</sup> |
| Package 1 width   | 0.41 m               |
| Package 1 length  | 0.42 m               |
| Package 1 height  | 0.18 m               |
| Warranty*         | 60 months            |


\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

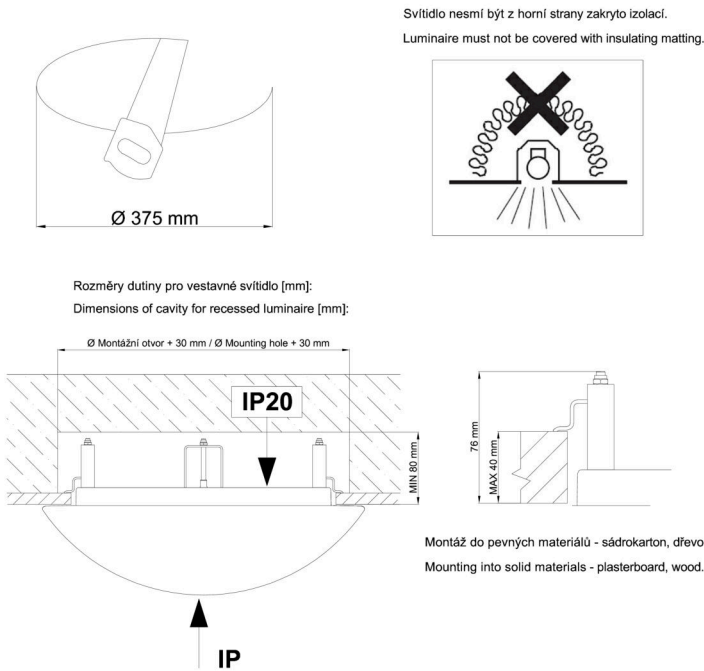

## Additional assortment:

## Lampshade

| Product code | Name  | Color         | Description | Picture  | Drawing |
|--------------|-------|---------------|-------------|--|---------|
| 20571        | PM23C | white - black |             |  |         |