



EDNA 5

LED-1L16EMP700K88/028 NK3HST 3K#

WWW.OSMONT.CZ

EDNA 5

Product code: EDN61226

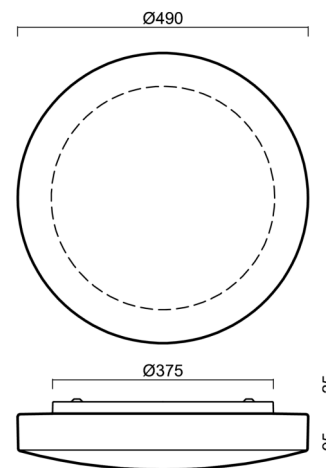
Type: LED-1L16EMP700K88/028 NK3HST 3K#

Short description of the luminaire: White colour | ceiling or wall LED light with emergency backup combined (with Self-test) | TRIPLEX OPAL hand blown glass shade|



Technical

Types of luminaires	Emergency combined
Mounting type	surface mounted
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	490 mm
Length	490 mm
Height	115 mm
mounting holes (diameter)	4xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from 0°C to +30°C



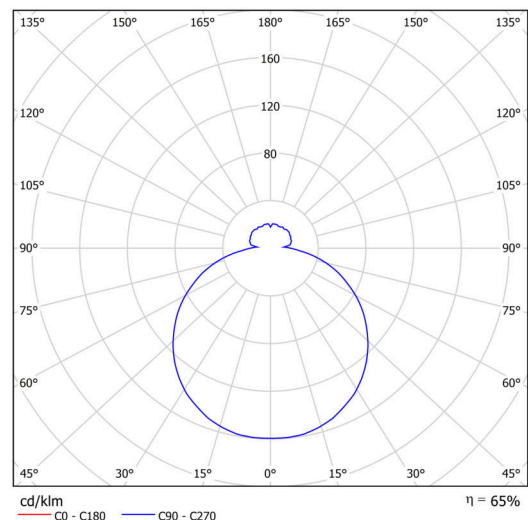
Electric

Power consumption	34 W
Ingress Protection	IP43
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
SELFTEST	yes
terminal block	snap terminal block

Luminous




Lum. flux of luminaire	3280 lm
Lum. flux of light source	5050 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at www.osmont.cz.





Additional assortment:

Decorative collar

Product code	Name	Color	Description	Picture	Drawing
30134	K86/DL15	brushed stainless steel	příslušenství		
30133	K86/DL14	polished stainless steel	příslušenství		
30132	K86/DL4	white Ral9003	příslušenství		

Base for surface mounting

Product code	Name	Color	Description	Picture	Drawing
33502	KN8,K8/BP	white Ral9003	příslušenství		

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20070	028	white	příslušenství	