



## ERIS CV3

---

LED-1L16E700KV88/413C HF CORR 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ERIS CV3

Product code: ERI67652

Type: LED-1L16E700KV88/413C HF CORR 4K#

Short description of the luminaire: White semi-recessed LED light with CORRIDOR function with TRIPLEX OPAL glass shade with black decorative stripe.



## Technical


|                              |                                |
|------------------------------|--------------------------------|
| Types of luminaires          | Corridor                       |
| Mounting type                | semi-recessed                  |
| Base material                | steel                          |
| Shade material               | three-layer glass TRIPLEX OPAL |
| Base color                   | white Ral9003                  |
| Shade color                  | white - black                  |
| Holding the shade            | folding system                 |
| Mounting location            | ceiling/wall                   |
| Width                        | 445 mm                         |
| Length                       | 445 mm                         |
| Height                       | 110 mm                         |
| Diameter                     | ø 445 mm                       |
| mounting holes (diameter)    | none                           |
| Installation wire (diameter) | 2xØ16mm                        |
| Energy Class                 | D                              |
| Impact strength              | IK01                           |
| Operating temperature        | from -20°C to +30°C            |

## Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 34 W                |
| Ingress Protection                  | IP44                |
| Socket                              | LED modul           |
| Sensor                              | HF                  |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 18 pcs              |
| Automatic circuit breaker type B16A | 28 pcs              |
| Automatic circuit breaker type C10A | 30 pcs              |
| Automatic circuit breaker type C16A | 46 pcs              |

## Luminous

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 2640 lm      |
| Lum. flux of light source   | 5270 lm      |
| Luminaire efficacy          | 77 lm/W      |
| Temperature                 | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

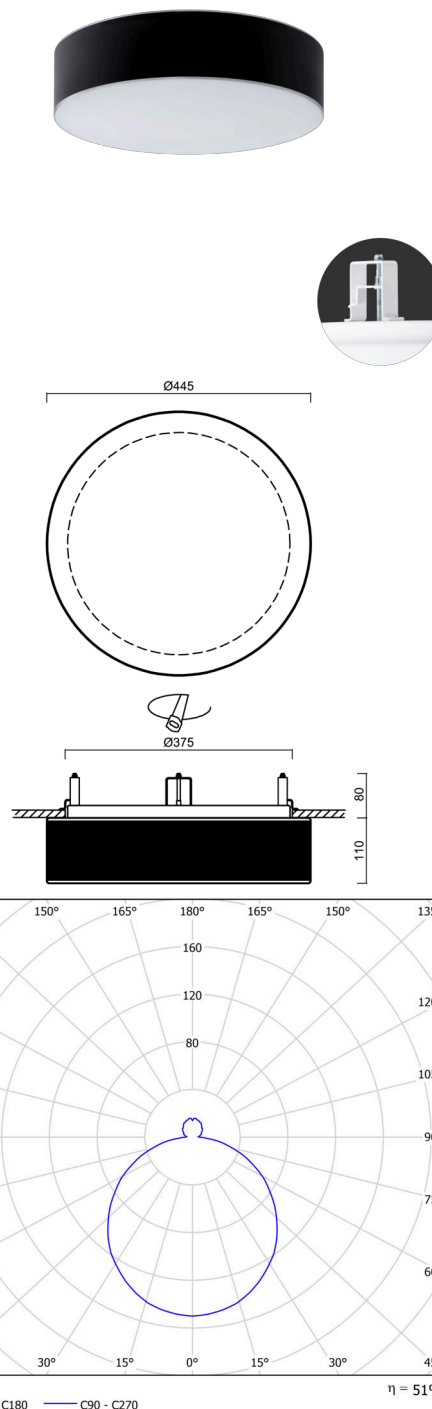


Eulum data for calculation programs are available at

Logistic


|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728119577        |
| Weight NTTO       | 5.9 Kg               |
| Weight BTTO       | 6.4 Kg               |
| Number of cartons | 1 pcs                |
| Package volume    | 0.049 m <sup>3</sup> |
| Package 1 width   | 0.454 m              |
| Package 1 length  | 0.454 m              |
| Package 1 height  | 0.24 m               |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.



Installation dimensions:



Svítlidlo nesmí být z horní strany zakryto izolací.  
Luminaire must not be covered with insulating matting.




Rozměry dutiny pro vestavné svítidlo [mm]:  
Dimensions of cavity for recessed luminaire [mm]:

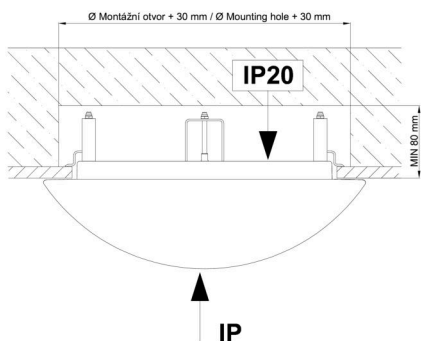

Montáž do pevných materiálů - sádkarton, dřevo.  
Mounting into solid materials - plasterboard, wood.

## Additional assortment:

## Lampshade

| Product code | Name | Color         | Description | Picture  | Drawing |
|--------------|------|---------------|-------------|--|---------|
| 20132        | 413C | white - black |             |  |         |