



## ISIS P1 PM-M

---

LED-5L05E500Z11/PM1M/a3 NB 3K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS P1 PM-M

Product code: ISI72442

Type: LED-5L05E500Z11/PM1M/a3 NB 3K#

Short description of the luminaire: Stainless brushed finish | pendant LED light | ON/OFF | PMMA matt shade



## Technical



|                              |                              |
|------------------------------|------------------------------|
| Types of luminaires          | Classic on/off               |
| Mounting type                | Suspended - rod              |
| Base material                | stainless steel steel        |
| Shade material               | opal polymethyl methacrylate |
| Base color                   | brushed stainless steel      |
| Shade color                  | white                        |
| Holding the shade            | steel holder                 |
| Mounting location            | ceiling                      |
| Width                        | 200 mm                       |
| Length                       | 200 mm                       |
| Height                       | 200 mm                       |
| Diameter                     | ø 200 mm                     |
| Hinge length                 | 600 mm                       |
| mounting holes (diameter)    | none                         |
| Installation wire (diameter) | none                         |
| Energy Class                 | D                            |
| Impact strength              | IK06                         |
| Operating temperature        | from -20°C to +30°C          |

## Electric

|                                     |           |
|-------------------------------------|-----------|
| Power consumption                   | 8 W       |
| Ingress Protection                  | IP40      |
| Socket                              | LED modul |
| terminal block                      | none      |
| Automatic circuit breaker type B10A | 50 pcs    |
| Automatic circuit breaker type B16A | 78 pcs    |
| Automatic circuit breaker type C10A | 84 pcs    |
| Automatic circuit breaker type C16A | 130 pcs   |

## Luminous

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 1080 lm      |
| Lum. flux of light source   | 1230 lm      |
| Luminaire efficacy          | 135 lm/W     |
| Temperature                 | 3000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

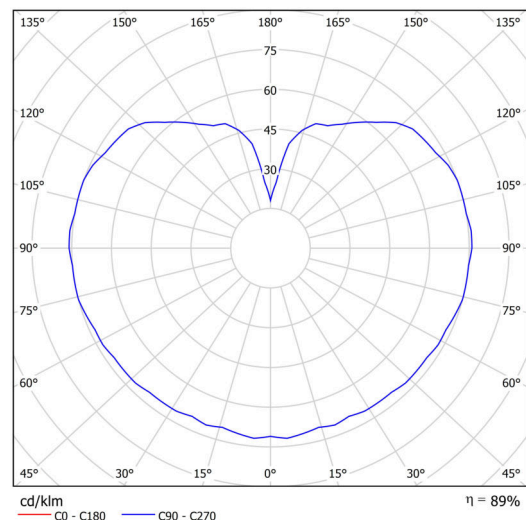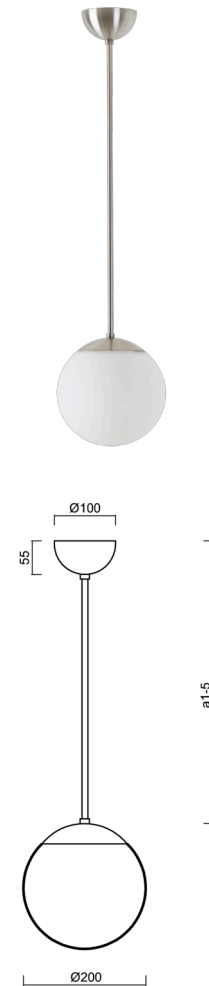

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).


Logistic

|                   |                     |
|-------------------|---------------------|
| EAN               | 8591728047245       |
| Weight NTTO       | 1.3 Kg              |
| Weight BTTO       | 1.9 Kg              |
| Number of cartons | 2 pcs               |
| Package volume    | 0.02 m <sup>3</sup> |
| Package 1 width   | 0.21 m              |
| Package 1 length  | 0.21 m              |
| Package 1 height  | 0.205 m             |
| Warranty*         | 60 months           |

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

Additional assortment:

Lampshade

| Product code | Name  | Color | Description | Picture  | Drawing |
|--------------|-------|-------|-------------|--|---------|
| 20623        | PM1-M | white |             |  |         |