



ISIS P2A PM

LED-5L06E300Z11/PM2A/L40 NB 3K#

WWW.OSMONT.CZ

ISIS P2A PM

Product code: ISI70396

Type: LED-5L06E300Z11/PM2A/L40 NB 3K#

Short description of the luminaire: Stainless steel brushed | pendant LED light ON/OFF | PMMA shade | rod pendant 40 cm |



Technical data


| | |
|---------------------------|------------------------------|
| Types of luminaires | Classic on/off |
| Mounting type | Suspended - rod |
| Base material | stainless steel steel |
| Shade material | opal polymethyl methacrylate |
| Base color | brushed stainless steel |
| Shade color | white |
| Holding the shade | steel holder |
| Mounting location | ceiling |
| Width | 250 mm |
| Length | 250 mm |
| Height | 250 mm |
| Diameter | ø 250 mm |
| Suspension length | 400 mm |
| mounting holes (diameter) | none |
| Energy Class | D |
| Impact strength | IK06 |
| Operating temperature | from -20°C to +30°C |

Electrical data

| | |
|-------------------------------------|-----------|
| Power consumption | 14 W |
| Ingress Protection | IP40 |
| Socket | LED modul |
| terminal block | none |
| Automatic circuit breaker type B10A | 72 pcs |
| Automatic circuit breaker type B16A | 116 pcs |
| Automatic circuit breaker type C10A | 72 pcs |
| Automatic circuit breaker type C16A | 116 pcs |
| Number of LED drivers | 1 |

Luminous data

| | |
|-----------------------------|--------------|
| Lum. flux of luminaire | 2010 lm |
| Lum. flux of light source | 2280 lm |
| Luminaire efficacy | 143 lm/W |
| Chromaticity temperature | 3000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

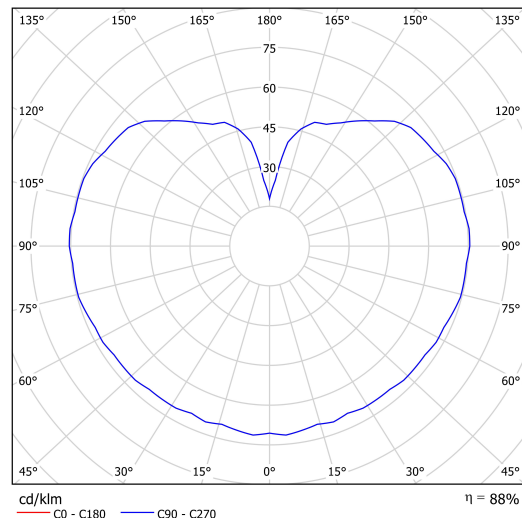

Eulum data for calculation programs are available at www.osmont.cz.

TECHNICAL SHEET



Logistical data

| | |
|-----------|---------------|
| EAN | 8591728211363 |
| Warranty* | 60 months |

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Additional assortment:

Lampshade

| Product code | Name | Color | Picture | Drawing |
|--------------|--------------|-------|---|---------|
| 20724 | PM2A (250mm) | white |  | |