



## ISIS P2A PM-M

LED-5L06E300Z11/PM2AM/L100 NB DALI 3K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS P2A PM-M

Product code: ISI70474

Type: LED-5L06E300Z11/PM2AM/L100 NB DALI 3K#

Short description of the luminaire: Stainless steel brushed | pendant LED light DALI | matt PMMA shadel rod pendant 100 cm |



## Technical data


Types of luminaires	Dimmable
Mounting type	Suspended - rod
Base material	stainless steel steel
Shade material	opal polymethyl methacrylate
Base color	brushed stainless steel
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	250 mm
Length	250 mm
Height	250 mm
Diameter	ø 250 mm
Suspension length	1000 mm
mounting holes (diameter)	none
Energy Class	D
Impact strength	IK06
Operating temperature	from -20°C to +30°C

## Electrical data

Power consumption	14 W
Ingress Protection	IP40
Socket	LED modul
terminal block	none
Automatic circuit breaker type B10A	41 pcs
Automatic circuit breaker type B16A	66 pcs
Automatic circuit breaker type C10A	66 pcs
Automatic circuit breaker type C16A	106 pcs
Switching current	≤ 7,5 A / 16 μsec
Number of LED drivers	1

## Luminous data

Lum. flux of luminaire	2010 lm
Lum. flux of light source	2280 lm
Luminaire efficacy	143 lm/W
Chromaticity temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

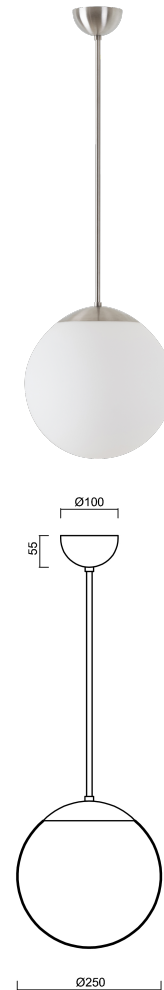

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

OSMONT, s.r.o.  
HYBRÁLEC 129,  
586 01 JIHLAVA, CZ

## TECHNICAL SHEET



### Logistical data

EAN	8591728212148
Warranty*	60 months

*\*The warranty for the batteries is valid for 36 months from the date of purchase.*

### Additional assortment:

#### Lampshade

Product code	Name	Color	Picture	Drawing
20725	PM2AM (250mm)	white	