



## ISIS P3 PM

---

LED-5L06E600Z11/PM3/a2/NK1W NL 4K#


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS P3 PM

Product code: ISI63956

Type: LED-5L06E600Z11/PM3/a2/NK1W NL 4K#

Short description of the luminaire: Stainless steel polished | pendant LED light with emergency backup combined | PMMA shade | rod pendant 40 cm |



## Technical

Types of luminaires	Emergency combined
Mounting type	Suspended - rod
Base material	stainless steel steel
Shade material	glossy polymethyl methacrylate
Base color	polished stainless steel
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	400 mm
Length	400 mm
Height	400 mm
Diameter	ø 400 mm
Hinge length	400 mm
mounting holes (diameter)	none
Cable entrance	none
Energy Class	D
Impact strength	IK06
Operating temperature	from 0°C to +30°C




## Electric

Power consumption	27 W
Ingress Protection	IP40
Socket	LED modul
Battery type	LiFePO4
Emergency time	1 hours
SELFTEST	no
terminal block	none
Automatic circuit breaker type B10A	23 pcs
Automatic circuit breaker type B16A	36 pcs
Automatic circuit breaker type C10A	40 pcs
Automatic circuit breaker type C16A	64 pcs

## Luminous

Lum. flux of luminaire	4070 lm
Lum. flux of light source	4630 lm
Lum. flux of light source in emergency mode	170 lm
Luminaire efficacy	150 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80

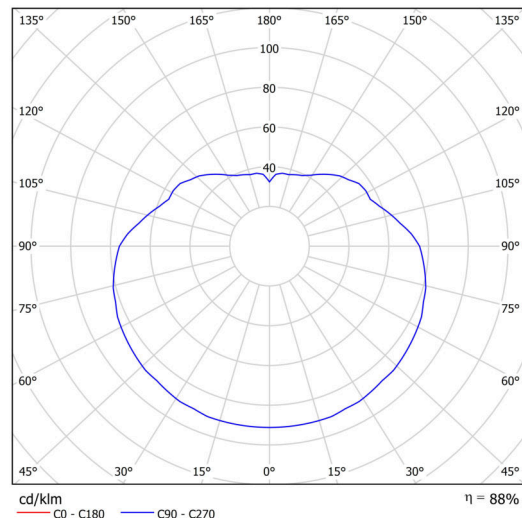

## TECHNICAL SHEET



MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

### Logistic

EAN	8591728025618
Weight NTTO	3.2 Kg
Weight BTTO	4.3 Kg
Number of cartons	2 pcs
Package volume	0.088 m <sup>3</sup>
Package 1 width	0.405 m
Package 1 length	0.405 m
Package 1 height	0.41 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

### Additional assortment:

#### Lampshade

Product code	Name	Color	Description	Picture	Drawing
20601	PM3	white	příslušenství	