



## ISIS P3A PM-M

LED-5L06E550Z11/PM3AM/L80 NK3HST NB 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS P3A PM-M

Product code: ISI74878

Type: LED-5L06E550Z11/PM3AM/L80 NK3HST NB 4K#

Short description of the luminaire: Stainless steel brushed | pendant LED light with emergency backup combined ( with Self-test) | matt PMMA shade| rod pendant 80 cm |



## Technical data


|                           |                              |
|---------------------------|------------------------------|
| Types of luminaires       | Emergency combined SELFTEST  |
| Mounting type             | Suspended - rod              |
| Base material             | stainless steel steel        |
| Shade material            | opal polymethyl methacrylate |
| Base color                | brushed stainless steel      |
| Shade color               | white                        |
| Holding the shade         | steel holder                 |
| Mounting location         | ceiling                      |
| Width                     | 350 mm                       |
| Length                    | 350 mm                       |
| Height                    | 350 mm                       |
| Diameter                  | ø 350 mm                     |
| Suspension length         | 800 mm                       |
| mounting holes (diameter) | none                         |
| Energy Class              | D                            |
| Impact strength           | IK06                         |
| Operating temperature     | from +5°C to +30°C           |

## Electrical data

|                                     |           |
|-------------------------------------|-----------|
| Power consumption                   | 26 W      |
| Ingress Protection                  | IP40      |
| Socket                              | LED modul |
| Battery type                        | LiFePO4   |
| Emergency time                      | 3 hours   |
| SELFTEST                            | yes       |
| terminal block                      | none      |
| Automatic circuit breaker type B10A | 15 pcs    |
| Automatic circuit breaker type B16A | 25 pcs    |
| Automatic circuit breaker type C10A | 31 pcs    |
| Automatic circuit breaker type C16A | 48 pcs    |
| Number of LED drivers               | 1         |

## Luminous data

|                                             |              |
|---------------------------------------------|--------------|
| Lum. flux of luminaire                      | 3750 lm      |
| Lum. flux of light source                   | 4260 lm      |
| Lum. flux of light source in emergency mode | 200 lm       |
| Luminaire efficacy                          | 144 lm/W     |
| Chromaticity temperature                    | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |

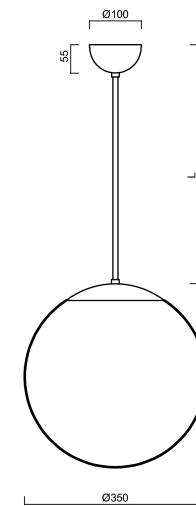

## TECHNICAL SHEET



|                   |              |
|-------------------|--------------|
| CRI               | Ra80         |
| MacAdam           | 3            |
| Blue light hazard | Risk group 0 |

*Eulum data for calculation programs are available at  
www.osmont.cz.*


### Logistical data

|           |               |
|-----------|---------------|
| EAN       | 8591728222345 |
| Warranty* | 60 months     |

*\*The warranty for the batteries is valid for 36 months from the date of purchase.*

### Additional assortment:

#### Lampshade

| Product code | Name          | Color | Picture                                                                            | Drawing |
|--------------|---------------|-------|------------------------------------------------------------------------------------|---------|
| 20727        | PM3AM (350mm) | white |  |         |