



## ISIS P4 PE

---

LED-5L07E900Z11/PE4/a3/NK1W NL 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS P4 PE

Product code: ISI66642


Type: LED-5L07E900Z11/PE4/a3/NK1W NL 4K##

Short description of the luminaire: Stainless steel polished | pendant LED light with emergency backup combined | polyethylene shade | rod pendant 60 cm |



## Technical

Types of luminaires	Emergency combined
Mounting type	Suspended - rod
Base material	stainless steel steel
Shade material	polyethylene
Base color	polished stainless steel
Shade color	white
Holding the shade	folding system
Mounting location	ceiling
Width	500 mm
Length	500 mm
Height	500 mm
Diameter	ø 500 mm
Hinge length	600 mm
mounting holes (diameter)	none
Cable entrance	none
Energy Class	D
Impact strength	IK10
Operating temperature	from 0°C to +30°C

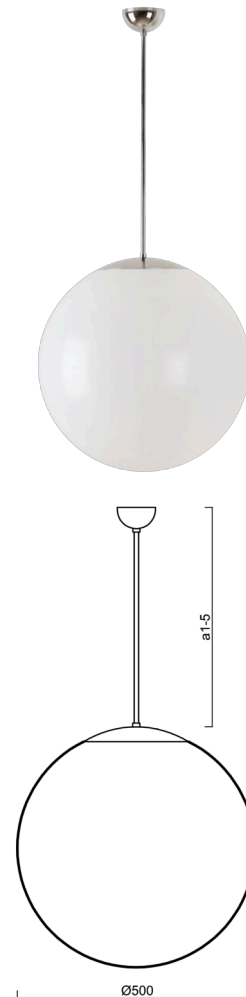

## Electric

Power consumption	41 W
Ingress Protection	IP40
Socket	LED modul
Battery type	NiCd
Emergency time	3 hours
SELFTTEST	no
terminal block	none
Automatic circuit breaker type B10A	25 pcs
Automatic circuit breaker type B16A	43 pcs
Automatic circuit breaker type C10A	29 pcs
Automatic circuit breaker type C16A	52 pcs

## Luminous

Lum. flux of luminaire	6120 lm
Lum. flux of light source	6960 lm
Lum. flux of light source in emergency mode	150 lm
Luminaire efficacy	149 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80



## TECHNICAL SHEET



MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

### Logistic

EAN	8591728037383
Weight NTTO	4.4 Kg
Weight BTTO	6.3 Kg
Number of cartons	2 pcs
Package volume	0.171 m <sup>3</sup>
Package 1 width	0.52 m
Package 1 length	0.52 m
Package 1 height	0.53 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

### Additional assortment:

#### Lampshade

Product code	Name	Color	Description	Picture	Drawing
20531	PE4	white	příslušenství	