



## ISIS P4 PE HP

LED-5L08E950Z11/PE4/a2 NB DALI 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

## ISIS P4 PE HP

Product code: ISI62996

Type: LED-5L08E950Z11/PE4/a2 NB DALI 4K##

Short description of the luminaire: Stainless steel brushed | pendant high-power LED light DALI | polyethylene shade | rod pendant 40 cm |

### Technical

|                           |                         |
|---------------------------|-------------------------|
| Types of luminaires       | Dimmable                |
| Mounting type             | Suspended - rod         |
| Base material             | stainless steel steel   |
| Shade material            | polyethylene            |
| Base color                | brushed stainless steel |
| Shade color               | white                   |
| Holding the shade         | folding system          |
| Mounting location         | ceiling                 |
| Width                     | 500 mm                  |
| Length                    | 500 mm                  |
| Height                    | 500 mm                  |
| Diameter                  | ø 500 mm                |
| Hinge length              | 400 mm                  |
| mounting holes (diameter) | 3xø5mm                  |
| Cable entrance            | 2xø16mm                 |
| Energy Class              | D                       |
| Impact strength           | IK10                    |
| Operating temperature     | from -20°C to +30°C     |



### Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 59 W                |
| Ingress Protection                  | IP40                |
| Socket                              | LED modul           |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 15 pcs              |
| Automatic circuit breaker type B16A | 25 pcs              |
| Automatic circuit breaker type C10A | 26 pcs              |
| Automatic circuit breaker type C16A | 42 pcs              |

### Luminous


|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 8450 lm      |
| Lum. flux of light source   | 9600 lm      |
| Luminaire efficacy          | 143 lm/W     |
| Temperature                 | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

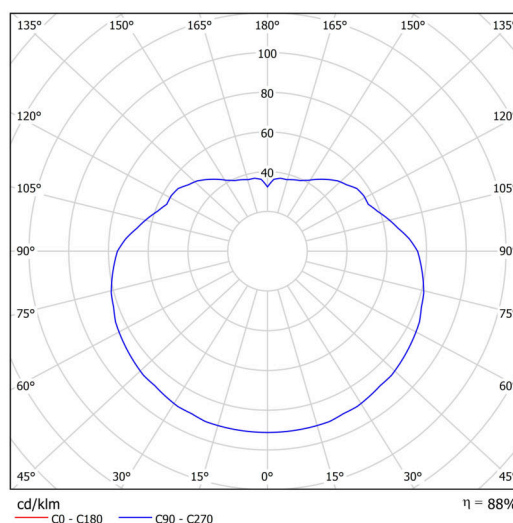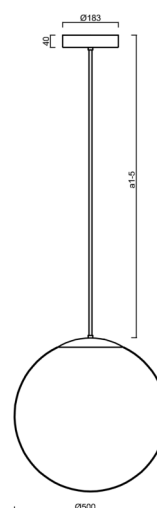

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728020361        |
| Weight NTO        | 4.4 Kg               |
| Weight BTO        | 6.3 Kg               |
| Number of cartons | 2 pcs                |
| Package volume    | 0.164 m <sup>3</sup> |
| Package 1 width   | 0.52 m               |
| Package 1 length  | 0.52 m               |
| Package 1 height  | 0.53 m               |
| Warranty*         | 60 months            |

### Installation dimensions:

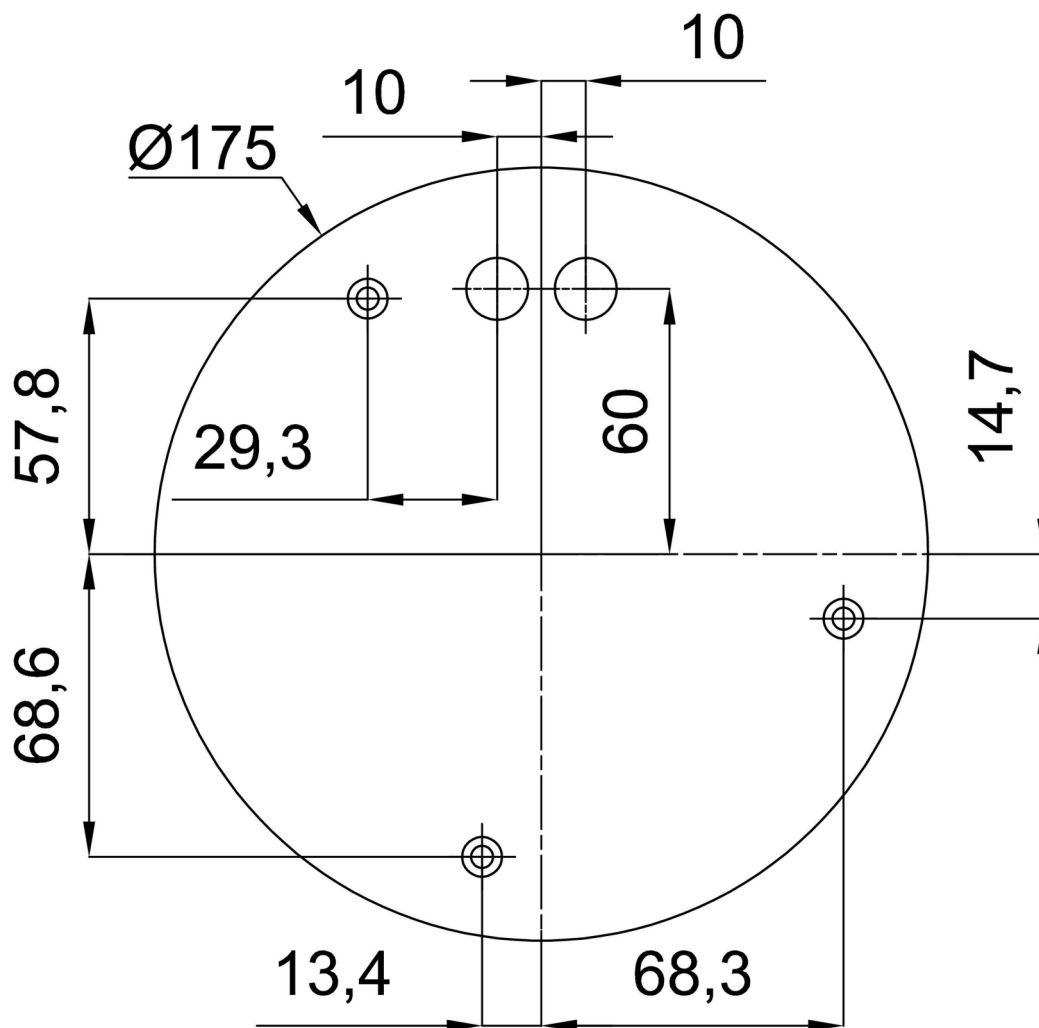

## Additional assortment:

## Lampshade

| Product code | Name | Color | Description   | Picture                                                                             | Drawing |
|--------------|------|-------|---------------|-------------------------------------------------------------------------------------|---------|
| 20531        | PE4  | white | příslušenství |  |         |