



## ISIS P5 PM-M

LED-5L07E1050Z11/PM5M/a3 NB DALI 3K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS P5 PM-M

Product code: ISI60187

Type: LED-5L07E1050Z11/PM5M/a3 NB DALI 3K##

Short description of the luminaire: Stainless brushed finish | pendant LED light | dimmable DALI | PMMA matt shade



## Technical



Types of luminaires	Dimmable
Mounting type	Suspended - rod
Base material	stainless steel steel
Shade material	opal polymethyl methacrylate
Base color	brushed stainless steel
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	600 mm
Length	600 mm
Height	600 mm
Diameter	ø 600 mm
Hinge length	600 mm
mounting holes (diameter)	none
Installation wire (diameter)	none
Energy Class	D
Impact strength	IK06
Operating temperature	from -20°C to +30°C

## Electric

Power consumption	48 W
Ingress Protection	IP40
Socket	LED modul
terminal block	none
Automatic circuit breaker type B10A	14 pcs
Automatic circuit breaker type B16A	23 pcs
Automatic circuit breaker type C10A	23 pcs
Automatic circuit breaker type C16A	38 pcs

## Luminous

Lum. flux of luminaire	6810 lm
Lum. flux of light source	7740 lm
Luminaire efficacy	141 lm/W
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

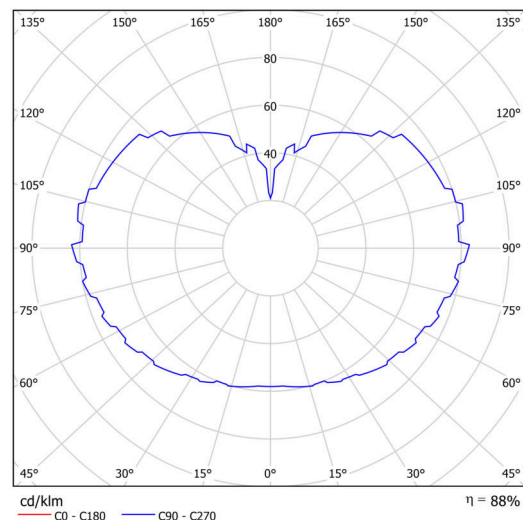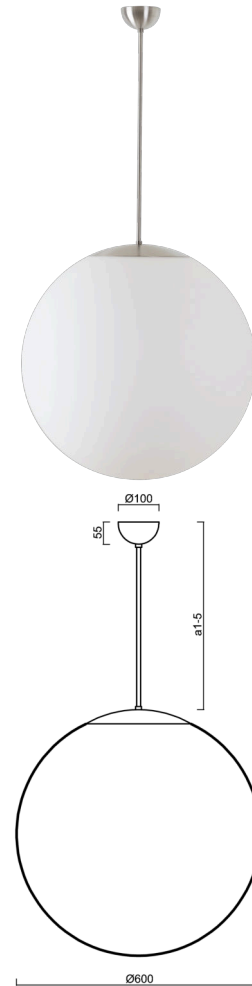

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

## TECHNICAL SHEET



### Logistic

EAN	8591728013691
Weight NTTO	5.4 Kg
Weight BTTO	8 Kg
Number of cartons	2 pcs
Package volume	0.278 m <sup>3</sup>
Package 1 width	0.62 m
Package 1 length	0.62 m
Package 1 height	0.63 m
Warranty*	60 months

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

### Additional assortment:

#### Lampshade

Product code	Name	Color	Description	Picture	Drawing
20667	PM5-M	white		