

## ISIS S1 PM-M

---

LED-5L05E500ZS11/PM1M/L100 NL 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS S1 PM-M

Product code: ISI72976


Type: LED-5L05E500ZS11/PM1M/L100 NL 4K#

Short description of the luminaire: Stainless polished finish | pendant LED light | ON/OFF | PMMA matt shade



## Technical

Types of luminaires	Classic on/off
Mounting type	Suspended - cable
Base material	stainless steel steel
Shade material	opal polymethyl methacrylate
Base color	polished stainless steel
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	200 mm
Length	200 mm
Height	200 mm
Diameter	ø 200 mm
Hinge length	1000 mm
mounting holes (diameter)	none
Installation wire (diameter)	none
Energy Class	D
Impact strength	IK06
Operating temperature	from -20°C to +30°C

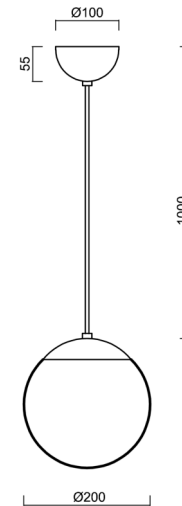


## Electric

Power consumption	8 W
Ingress Protection	IP40
Socket	LED modul
terminal block	none
Automatic circuit breaker type B10A	50 pcs
Automatic circuit breaker type B16A	78 pcs
Automatic circuit breaker type C10A	84 pcs
Automatic circuit breaker type C16A	130 pcs

## Luminous

Lum. flux of luminaire	1130 lm
Lum. flux of light source	1280 lm
Luminaire efficacy	141 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

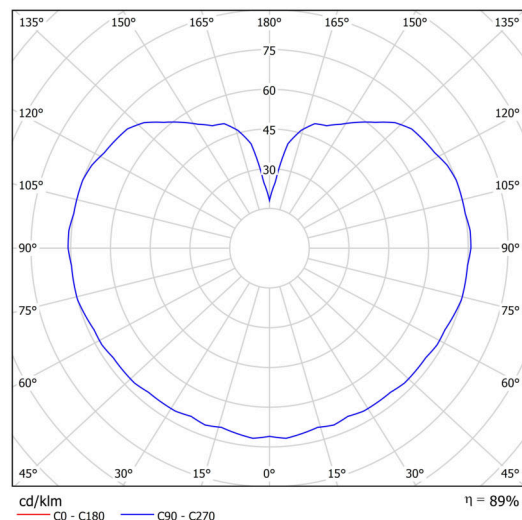

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic

EAN	8591728050283
Weight NTTO	1.5 Kg
Weight BTTO	1.8 Kg
Number of cartons	2 pcs
Package volume	0.014 m <sup>3</sup>
Package 1 width	0.21 m
Package 1 length	0.21 m
Package 1 height	0.205 m
Warranty*	60 months

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

Additional assortment:

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20623	PM1-M	white		