



## ISIS S3A PM-M

LED-5L06E550ZS11/PM3AM/L100 NK3HST NL 3K#


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ISIS S3A PM-M

Product code: ISI75055

Type: LED-5L06E550ZS11/PM3AM/L100 NK3HST NL 3K#

Short description of the luminaire: Stainless steel polished | pendant LED light with emergency backup combined ( with Self-test) | matt PMMA shade| cable pendant ( with inner support wire) 100 cm |

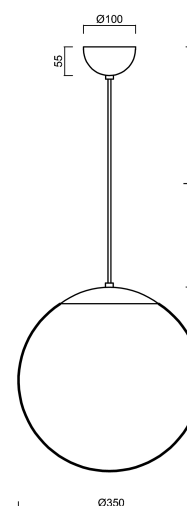

## Technical data

Types of luminaires	Emergency combined SELFTEST
Mounting type	Suspended - cable
Base material	stainless steel steel
Shade material	opal polymethyl methacrylate
Base color	polished stainless steel
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	350 mm
Length	350 mm
Height	350 mm
Diameter	Ø 350 mm
Suspension length	1000 mm
mounting holes (diameter)	none
Energy Class	D
Impact strength	IK06
Operating temperature	from +5°C to +30°C

## Electrical data

Power consumption	26 W
Ingress Protection	IP40
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
SELFTEST	yes
terminal block	none
Automatic circuit breaker type B10A	15 pcs
Automatic circuit breaker type B16A	25 pcs
Automatic circuit breaker type C10A	31 pcs
Automatic circuit breaker type C16A	48 pcs
Number of LED drivers	1

## Luminous data

Lum. flux of luminaire	3590 lm
Lum. flux of light source	4080 lm
Lum. flux of light source in emergency mode	200 lm
Luminaire efficacy	138 lm/W
Chromaticity temperature	3000 K



## TECHNICAL SHEET



Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

*Eulum data for calculation programs are available at  
www.osmont.cz.*

## Logistical data

EAN	8591728223915
Warranty*	60 months

*\*The warranty for the batteries is valid for 36 months from the date of purchase.*

## Additional assortment:

### Lampshade

Product code	Name	Color	Picture	Drawing
20727	PM3AM (350mm)	white	