

## KRUGER 2 FOP


Private: LED-1L16E500KN83/FOP2C NK3HST 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# KRUGER 2 FOP

Product code: KRU60760

Type: Private: LED-1L16E500KN83/FOP2C NK3HST 4K#




## Technical

|                              |  |
|------------------------------|--|
| Types of luminaires          | Emergency combined                             |
| Mounting type                | surface mounted                                |
| Base material                | steel  |
| Shade material               | Plastic opal prismatic (FOP) with metal collar |
| Shade color                  | white - black                                  |
| Holding the shade            | folding system                                 |
| Mounting location            | ceiling/wall                                   |
| Width                        | 395 mm   |
| Length                       | 395 mm   |
| Height                       | 80 mm  |
| mounting holes (diameter)    | 3xØ5mm   |
| Installation wire (diameter) | 2xØ16mm  |
| Impact strength              | IKxx   |




## Electric

|                    |                     |
|--------------------|---------------------|
| Power consumption  | 24 W                |
| Ingress Protection | IP40                |
| Socket             | LED modul           |
| Battery type       | LiFePO4             |
| Emergency time     | 3 hours             |
| terminal block     | snap terminal block |



## Luminous

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 2110 lm      |
| Lum. flux of light source                   | 3910 lm      |
| Lum. flux of light source in emergency mode | 200 lm       |
| Temperature                                 | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

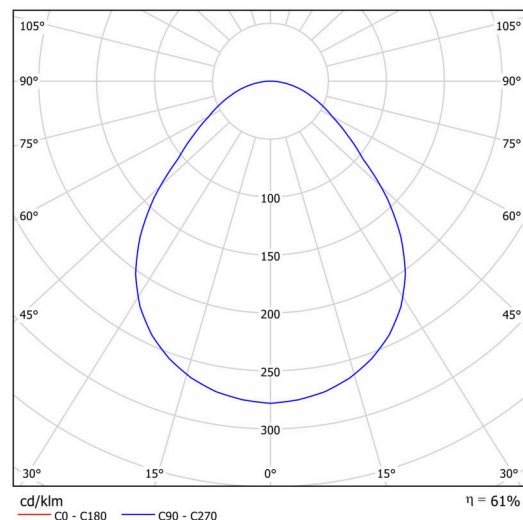

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

TECHNICAL SHEET



Logistic

|                   |               |
|-------------------|---------------|
| EAN               | 8591728158187 |
| Number of cartons | 1 pcs         |

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

Installation dimensions:

