

## KRUGER 2 FOP


Soukromý: LED-1L16E500KN83/FOP2C NK3HST HF 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# KRUGER 2 FOP

Product code: KRU60761

Type: Soukromý: LED-1L16E500KN83/FOP2C NK3HST HF 4K#




## Technical

Types of luminaires	Emergency combined + sensor
Mounting type	surface mounted
Base material	steel
Shade material	Plastic opal prismatic (FOP) with metal collar
Shade color	white - black
Holding the shade	folding system
Mounting location	ceiling/wall
Width	395 mm
Length	395 mm
Height	80 mm
mounting holes (diameter)	3xØ5mm
Installation wire (diameter)	2xØ16mm
Impact strength	IKxx




## Electric

Power consumption	24 W
Ingress Protection	IP40
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block



## Luminous

Lum. flux of luminaire	2110 lm
Lum. flux of light source	3910 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

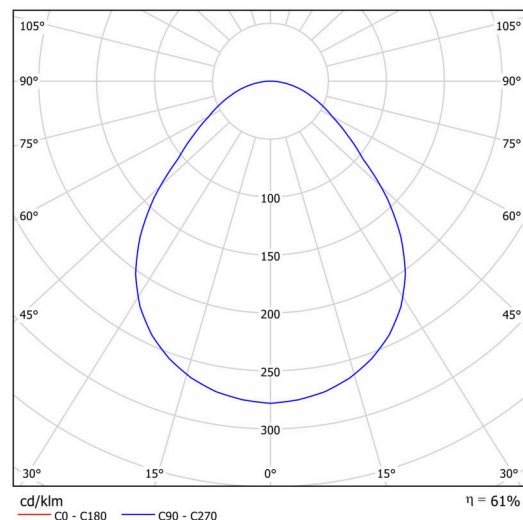

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

TECHNICAL SHEET



Logistic

EAN	8591728158194
Number of cartons	1 pcs

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

Installation dimensions:

