



## KRUGER 4 FO

Private: LED-6L51EMP700KN10/F04C NK3H 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# KRUGER 4 FO

Product code: KRU50519

Type: Private: LED-6L51EMP700KN10/FO4C NK3H 4K##

Short description of the luminaire: Black colour | ceiling or wall LED light with emergency backup combined | multipower driver | opal plastic shade| decorative collar | |



## Technical data

|                           |                                     |
|---------------------------|-------------------------------------|
| Types of luminaires       | Emergency combined                  |
| Mounting type             | surface mounted                     |
| Base material             | steel                               |
| Shade material            | Plastic opal (FO) with metal collar |
| Base color                | black Ral9005                       |
| Shade color               | white - black                       |
| Holding the shade         | folding system                      |
| Mounting location         | ceiling/wall                        |
| Width                     | 645 mm                              |
| Length                    | 645 mm                              |
| Height                    | 80 mm                               |
| Diameter                  | ø 645 mm                            |
| mounting holes (diameter) | 2xø5mm                              |
| Cable entrance            | 2xø16mm                             |
| Operating temperature     | from -20°C to +30°C                 |




## Electrical data

|                    |                     |
|--------------------|---------------------|
| Power consumption  | 65 W                |
| Ingress Protection | IP40                |
| Socket             | LED modul           |
| Battery type       | LiFePO4             |
| Emergency time     | 3 hours             |
| terminal block     | snap terminal block |

## Luminous data

|   |              |
|---|--------------|
| Lum. flux of luminaire                      | 7030 lm      |
| Lum. flux of light source                   | 10980 lm     |
| Lum. flux of light source in emergency mode | 200 lm       |
| Chromaticity temperature                    | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI   | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

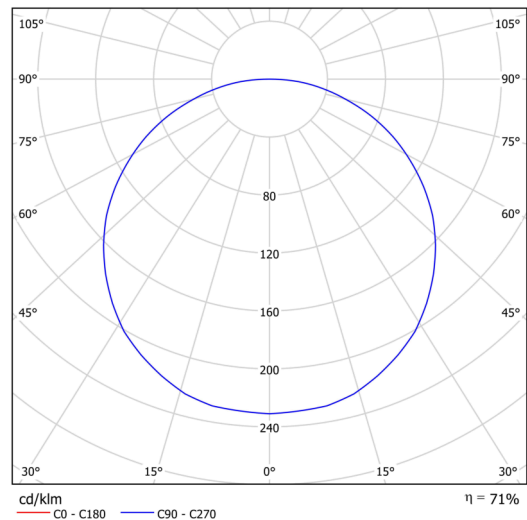

# TECHNICAL SHEET




## Logistical data

|                   |               |
|-------------------|---------------|
| EAN               | 8591728229788 |
| Number of cartons | 1 pcs         |
| Warranty*         | 60 months     |

\*The warranty for the batteries is valid for 36 months from the date of purchase.

## Installation dimensions:

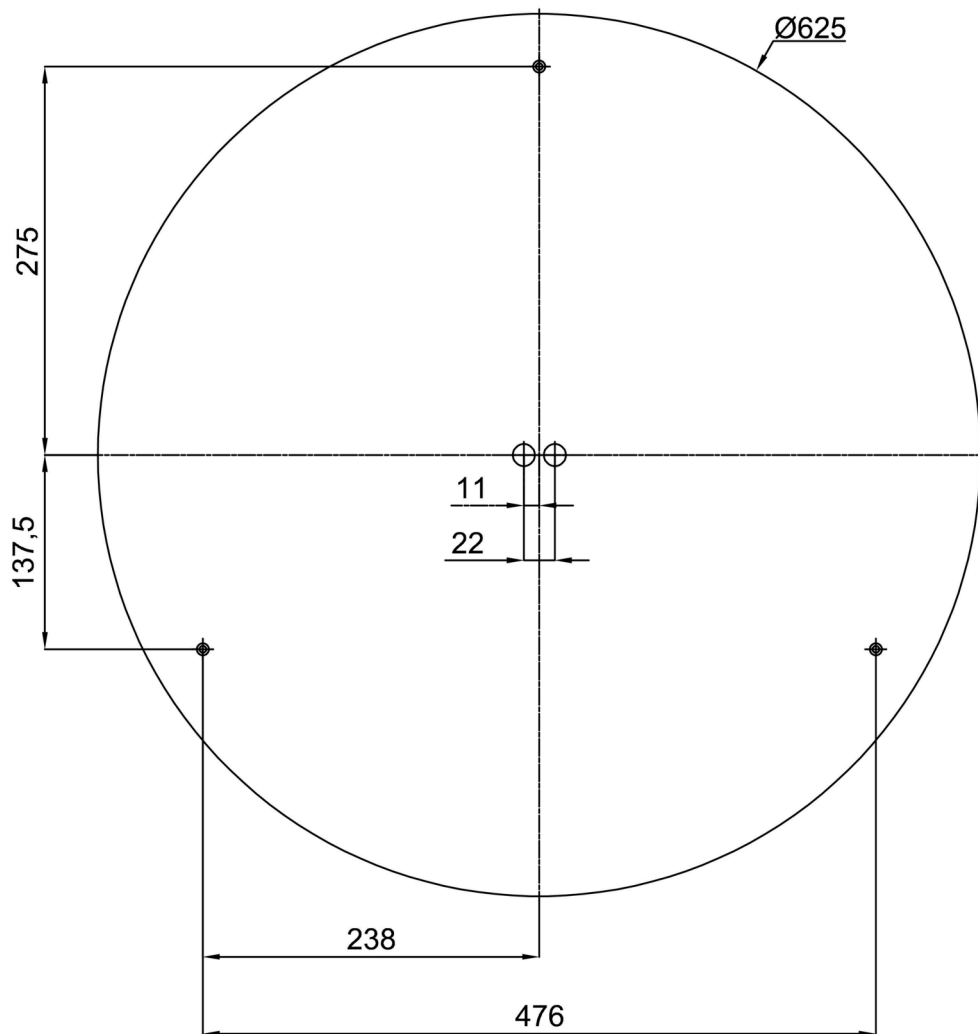

## Additional assortment:

## Lampshade

| Product code | Name | Color            | Picture   | Drawing |
|--------------|------|------------------|---|---------|
| 20730        | F04C | white -<br>black |  |         |