



## KRUGER P2 FOP


Private: LED-1L16EMP700ZKN83/F0P2C/z5 NK3HST C 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# KRUGER P2 FOP


Product code: KRU60787

Type: Private: LED-1L16EMP700ZKN83/FOP2C/z5 NK3HST C 4K#



## Technical

Types of luminaires	Emergency combined
Mounting type	Suspended - rod
Base material	steel
Shade material	Plastic opal prismatic (FOP) with metal collar
Shade color	white - black
Holding the shade	folding system
Mounting location	ceiling
Width	395 mm
Length	395 mm
Height	80 mm
mounting holes (diameter)	2xØ5mm
Installation wire (diameter)	2xØ16mm
Impact strength	IKxx

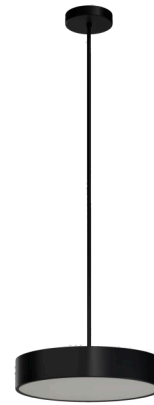



## Electric

Power consumption	34 W
Ingress Protection	IP40
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	screw terminal block

## Luminous

Lum. flux of luminaire	2850 lm
Lum. flux of light source	5270 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

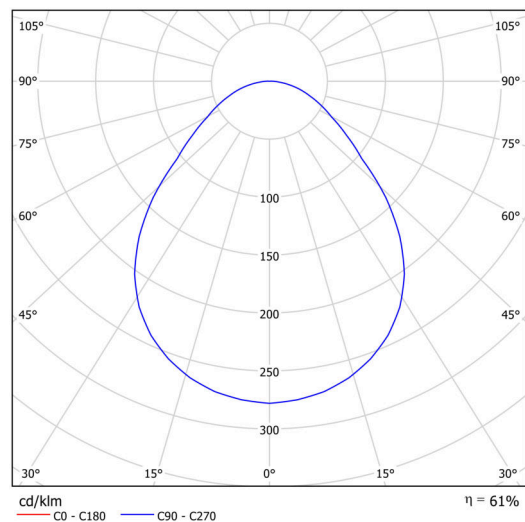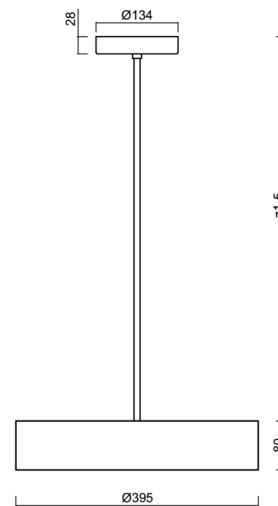

TECHNICAL SHEET



Logistic

EAN	8591728158453
Number of cartons	1 pcs

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

Installation dimensions:

