

KRUGER P3 FOP


Private: LED-1L20EMP1050ZKN94/FOP3B/z5 NK3HST B 3K#

WWW.OSMONT.CZ

KRUGER P3 FOP

Product code: KRU60291

Type: Private: LED-1L20EMP1050ZKN94/FOP3B/z5 NK3HST B 3K#



Technical

| | |
|------------------------------|------------------------------------------------|
| Types of luminaires | Emergency combined |
| Mounting type | Suspended - rod |
| Base material | steel |
| Shade material | Plastic opal prismatic (FOP) with metal collar |
| Shade color | white |
| Holding the shade | folding system |
| Mounting location | ceiling |
| Width | 490 mm |
| Length | 490 mm |
| Height | 80 mm |
| mounting holes (diameter) | 2xØ5mm |
| Installation wire (diameter) | 2xØ16mm |
| Impact strength | IKxx |





Electric

| | |
|--------------------|----------------------|
| Power consumption | 48 W |
| Ingress Protection | IP40 |
| Socket | LED modul |
| Battery type | LiFePO4 |
| Emergency time | 3 hours |
| terminal block | screw terminal block |

Luminous

| | |
|---------------------------------------------|--------------|
| Lum. flux of luminaire | 4720 lm |
| Lum. flux of light source | 7740 lm |
| Lum. flux of light source in emergency mode | 200 lm |
| Temperature | 3000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

Eulum data for calculation programs are available at www.osmont.cz.

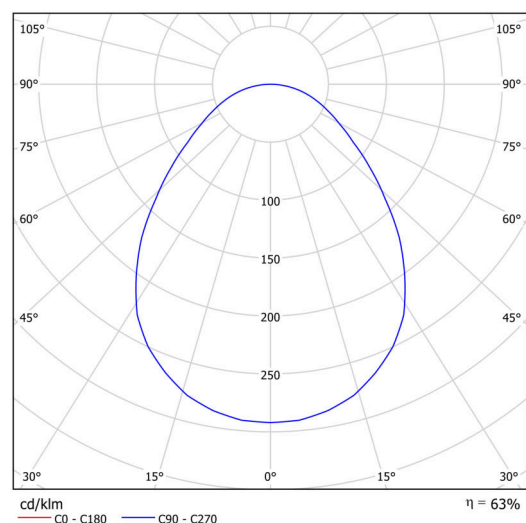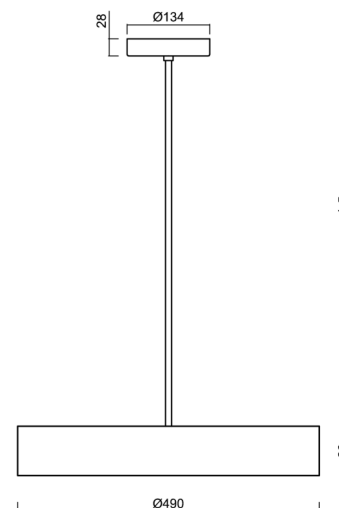

TECHNICAL SHEET



Logistic

| | |
|-------------------|---------------|
| EAN | 8591728157852 |
| Number of cartons | 1 pcs |

**The warranty for the batteries is valid for 12 months from the date of purchase.*

Installation dimensions:

