



## KUMA 3

---

LED-6L74-1L77E800BK1/436 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# KUMA 3

Product code: KUM68947



Type: LED-6L74-1L77E800BK1/436 4K##

Short description of the luminaire: White surface-mounted LED light ON/OFF with TRIPLEX OPAL glass shade.



## Technical

|                              |                                |
|------------------------------|--------------------------------|
| Types of luminaires          | Classic on/off                 |
| Mounting type                | surface mounted                |
| Base material                | steel                          |
| Shade material               | three-layer glass TRIPLEX OPAL |
| Base color                   | white Ral9003                  |
| Shade color                  | white                          |
| Holding the shade            | folding system                 |
| Mounting location            | ceiling/wall                   |
| Width                        | 150 mm                         |
| Length                       | 150 mm                         |
| Height                       | 552 mm                         |
| Diameter                     | ø 150 mm                       |
| mounting holes (diameter)    | 2xø5mm                         |
| Installation wire (diameter) | 1xø14mm                        |
| Energy Class                 | D                              |
| Impact strength              | IK01                           |
| Operating temperature        | from -20°C to +30°C            |




## Electric

|                                     |                      |
|-------------------------------------|----------------------|
| Power consumption                   | 34 W                 |
| Ingress Protection                  | IP20                 |
| Socket                              | LED modul            |
| terminal block                      | screw terminal block |
| Automatic circuit breaker type B10A | 45 pcs               |
| Automatic circuit breaker type B16A | 75 pcs               |
| Automatic circuit breaker type C10A | 45 pcs               |
| Automatic circuit breaker type C16A | 75 pcs               |

## Luminous

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 4590 lm      |
| Lum. flux of light source   | 5740 lm      |
| Luminaire efficacy          | 135 lm/W     |
| Temperature                 | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

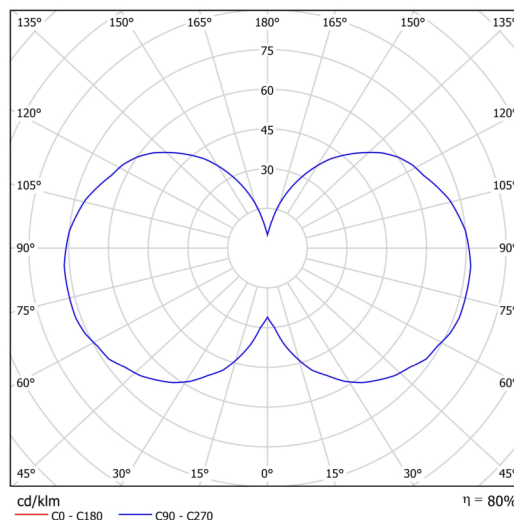


Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728138714        |
| Weight NTTO       | 3.7 Kg               |
| Weight BTTO       | 4.2 Kg               |
| Number of cartons | 1 pcs                |
| Package volume    | 0.028 m <sup>3</sup> |
| Package 1 width   | 0.62 m               |
| Package 1 length  | 0.19 m               |
| Package 1 height  | 0.24 m               |
| Warranty*         | 60 months            |


\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

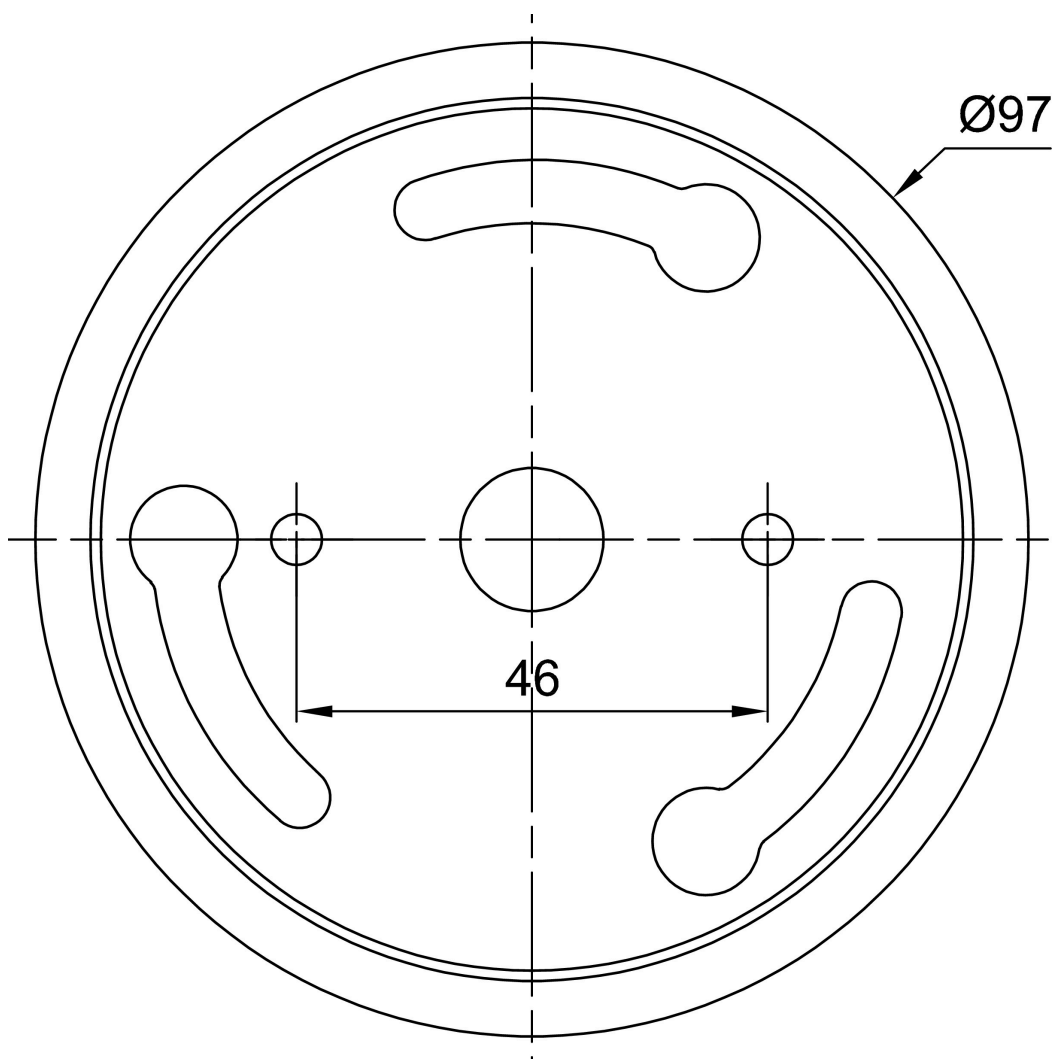

Additional assortment:

Lampshade

| Product code | Name | Color | Description | Picture   | Drawing |
|--------------|------|-------|-------------|---|---------|
| 20136        | 436  | white |             |  |         |