



LED

## KUMA S3

---

LED-6L76-1L77E800ZS11/436/L100 C 3K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# KUMA S3

Product code: KUM68406

Type: LED-6L76-1L77E800ZS11/436/L100 C 3K##

Short description of the luminaire: Black pendant LED light ON/OFF with TRIPLEX OPAL glass shade.



## Technical



Types of luminaires	Classic on/off
Mounting type	Suspended - cable
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	black Ral9005
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	150 mm
Length	150 mm
Height	550 mm
Diameter	ø 150 mm
Hinge length	1000 mm
mounting holes (diameter)	3xø5mm
Installation wire (diameter)	2xø16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C

## Electric

Power consumption	64 W
Ingress Protection	IP20
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	22 pcs
Automatic circuit breaker type B16A	37 pcs
Automatic circuit breaker type C10A	22 pcs
Automatic circuit breaker type C16A	37 pcs

## Luminous

Lum. flux of luminaire	8140 lm
Lum. flux of light source	10170 lm
Luminaire efficacy	127 lm/W
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

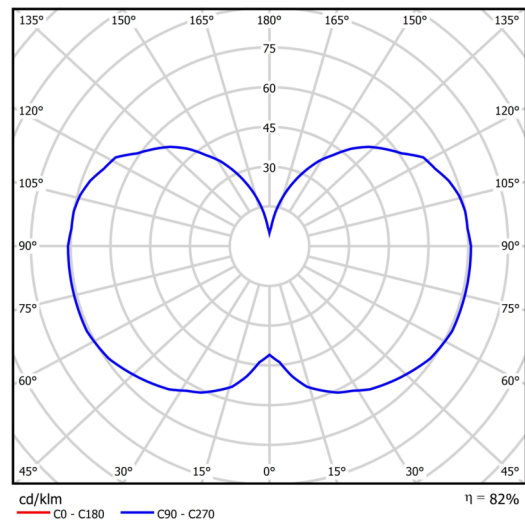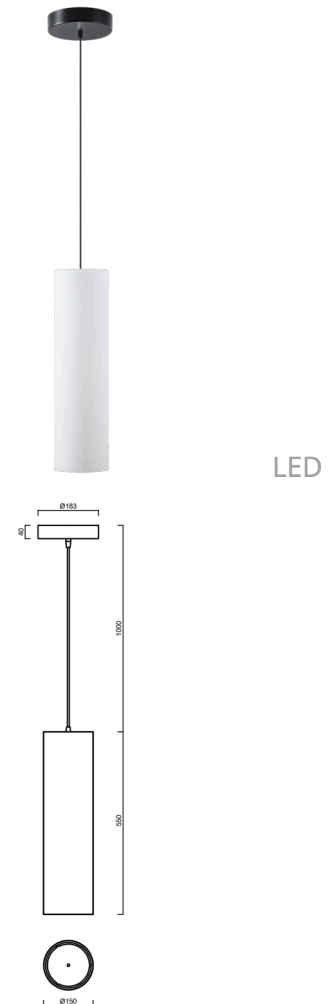

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic

EAN	8591728138554
Weight NTTO	3.9 Kg
Weight BTTO	4.4 Kg
Number of cartons	1 pcs
Package volume	0.028 m <sup>3</sup>
Package 1 width	0.62 m
Package 1 length	0.19 m
Package 1 height	0.24 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:



## Additional assortment:

## Lampshade

Product code	Name	Color	Description	Picture	Drawing
20136	436	white		