



LINA 6

LED-1L15EMP700K76/039 NK3HST 4K#

WWW.OSMONT.CZ

LINA 6

Product code: LIN67973


Type: LED-1L15EMP700K76/039 NK3HST 4K#

Short description of the luminaire: White colour | ceiling or wall LED light with emergency backup combined (with Self-test) | TRIPLEX OPAL hand blown glass shade|



Technical

| | |
|---------------------------|--------------------------------|
| Types of luminaires | Emergency combined |
| Mounting type | surface mounted |
| Base material | steel |
| Shade material | three-layer glass TRIPLEX OPAL |
| Base color | white Ral9003 |
| Shade color | white |
| Holding the shade | folding system |
| Mounting location | ceiling/wall |
| Width | 380 mm |
| Length | 380 mm |
| Height | 120 mm |
| mounting holes (diameter) | 4xØ5mm |
| Cable entrance | 2xØ16mm |
| Energy Class | D |
| Impact strength | IK01 |
| Operating temperature | from 0°C to +30°C |

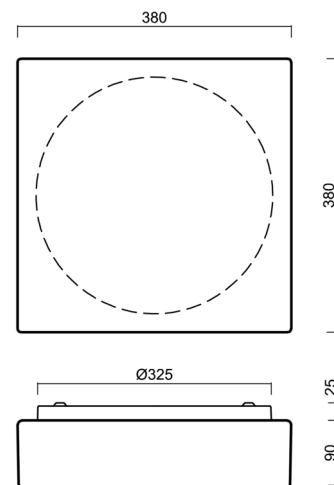


Electric

| | |
|--------------------|---------------------|
| Power consumption | 27 W |
| Ingress Protection | IP43 |
| Socket | LED modul |
| Battery type | LiFePO4 |
| Emergency time | 3 hours |
| SELFTEST | yes |
| terminal block | snap terminal block |

Luminous

| | |
|---|--------------|
| Lum. flux of luminaire | 2870 lm |
| Lum. flux of light source | 4220 lm |
| Lum. flux of light source in emergency mode | 200 lm |
| Temperature | 4000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

Eulum data for calculation programs are available at www.osmont.cz.

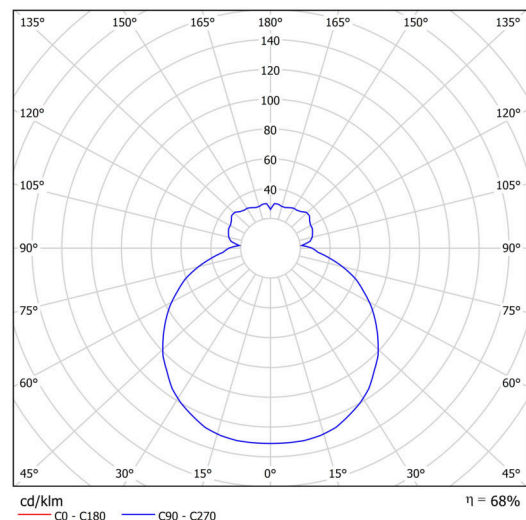

Additional assortment:

Lampshade

| Product code | Name | Color | Description | Picture | Drawing |
|--------------|------|-------|---------------|--|---------|
| 20053 | 039 | white | příslušenství |  | |