



MATAR 2

LED-1L78-1L79E400PA09/PC72 B DALI 3/35/4K##

WWW.OSMONT.CZ

MATAR 2

Product code: MAT71587

Type: LED-1L78-1L79E400PA09/PC72 B DALI 3/35/4K##

Short description of the luminaire: White colour | ceiling or wall LED light DALI | opal polycarbonate shade (PC)



Technical data

| | |
|---------------------------|---------------------|
| Types of luminaires | Dimmable |
| Mounting type | surface mounted |
| Base material | aluminium |
| Shade material | opal polycarbonate |
| Base color | white Ral9003 |
| Shade color | white |
| Holding the shade | spring |
| Mounting location | ceiling/wall |
| Width | 905 mm |
| Length | 58 mm |
| Height | 46 mm |
| mounting holes (diameter) | 2xØ5mm |
| Cable entrance | 2xØ16mm |
| Energy Class | D |
| Impact strength | IK10 |
| Operating temperature | from -20°C to +30°C |





Electrical data

| | |
|--------------------|---------------------|
| Power consumption | 15 W |
| Ingress Protection | IP44 |
| Socket | LED modul |
| terminal block | snap terminal block |

Luminous data

| | |
|-----------------------------|------------------|
| Lum. flux of luminaire | 1740/1820 lm |
| Lum. flux of light source | 2460/2560 lm |
| Chromaticity temperature | 3000/3500/4000 K |
| Rated life time LED L80/B10 | 100000 hours |
| CRI | Ra80 |
| MacAdam | 3 |
| Blue light hazard | Risk group 0 |

Eulum data for calculation programs are available at www.osmont.cz.

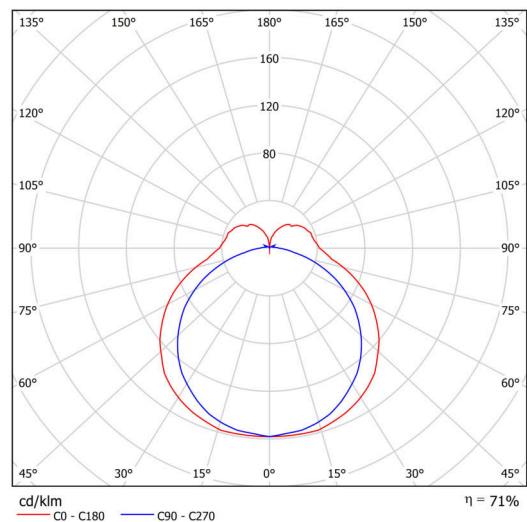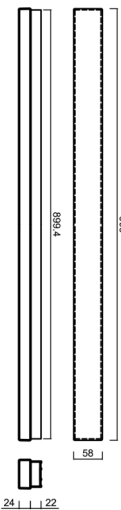

TECHNICAL SHEET




Logistical data

| | |
|-------------------|---------------|
| EAN | 8591728230814 |
| Weight NTTO | 1.05 Kg |
| Weight BTTO | 1.25 Kg |
| Number of cartons | 1 pcs |
| Warranty* | 60 months |



**The warranty for the batteries is valid for 36 months from the date of purchase.*

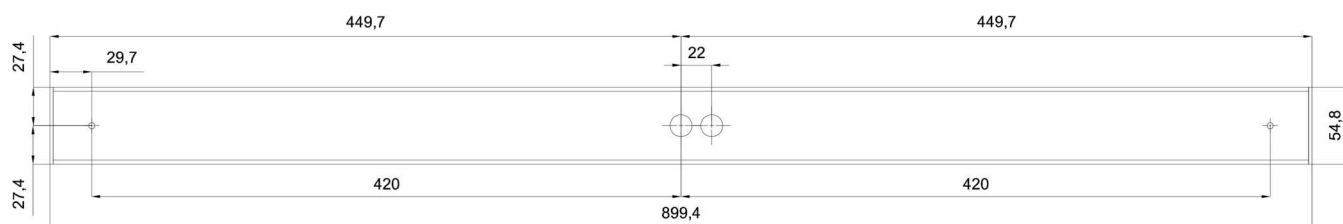Installation dimensions:



Additional assortment:

Lampshade

| Product code | Name | Color | Picture | Drawing |
|--------------|------|-------|---|---|
| 20609 | PC72 | white |  |  |