



## MATAR 3

---

Private: LED-2L79EMP700PA12/PC73 NK3HST B 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# MATAR 3

Product code: MAT71547

Type: Private: LED-2L79EMP700PA12/PC73 NK3HST B 4K##



## Technical

Types of luminaires	Emergency combined
Mounting type	surface mounted
Base material	aluminium
Shade material	opal polycarbonate
Shade color	white
Holding the shade	spring
Mounting location	ceiling/wall
Width	1200 mm
Length	60 mm
Height	46 mm
mounting holes (diameter)	2xØ5mm
Installation wire (diameter)	2xØ16mm
Impact strength	IK10




## Electric

Power consumption	26 W
Ingress Protection	IP44
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block

## Luminous

Lum. flux of luminaire	3120 lm
Lum. flux of light source	4390 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

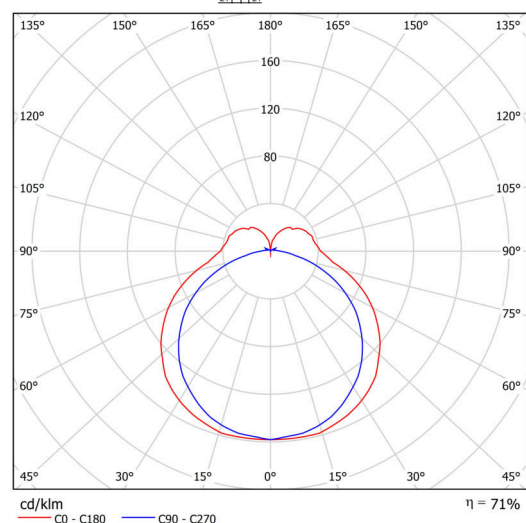

Enum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

# TECHNICAL SHEET



## Logistic

EAN	8591728158996
Number of cartons	1 pcs

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

## Installation dimensions:

