



## MATAR 5

---

Private: LED-1L88-1L89E500PB09/PC76 NK3HST C 3K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# MATAR 5

Product code: MAT71052

Type: Private: LED-1L88-1L89E500PB09/PC76 NK3HST C 3K##




## Technical

Types of luminaires	Emergency combined
Mounting type	surface mounted
Base material	aluminium
Shade material	opal polycarbonate
Shade color	white
Holding the shade	spring
Mounting location	ceiling/wall
Width	900 mm
Length	92 mm
Height	56 mm
mounting holes (diameter)	2xØ5mm
Installation wire (diameter)	2xØ16mm
Impact strength	IK10




## Electric

Power consumption	19 W
Ingress Protection	IP44
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block

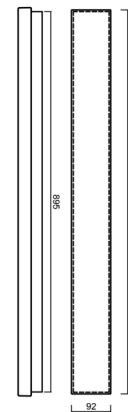

## Luminous

Lum. flux of luminaire	1990 lm
Lum. flux of light source	3060 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

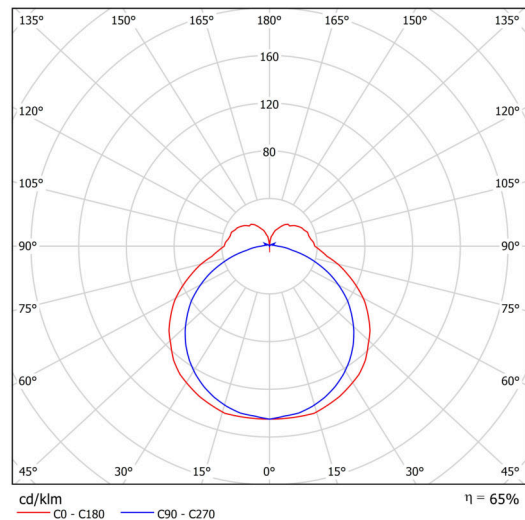

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

# TECHNICAL SHEET



## Logistic

EAN	8591728158965
Number of cartons	1 pcs

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

## Installation dimensions:

