



MATAR 5

Private: LED-1L88-1L89EMP700PB09/PC76 NK3HST C 3K##

WWW.OSMONT.CZ

MATAR 5

Product code: MAT71053

Type: Private: LED-1L88-1L89EMP700PB09/PC76 NK3HST C 3K##



Technical

Types of luminaires	Emergency combined
Mounting type	surface mounted
Base material	aluminium
Shade material	opal polycarbonate
Shade color	white
Holding the shade	spring
Mounting location	ceiling/wall
Width	900 mm
Length	92 mm
Height	56 mm
mounting holes (diameter)	2xØ5mm
Installation wire (diameter)	2xØ16mm
Impact strength	IK10





Electric

Power consumption	26 W
Ingress Protection	IP44
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block

Luminous

Lum. flux of luminaire	2720 lm
Lum. flux of light source	4180 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

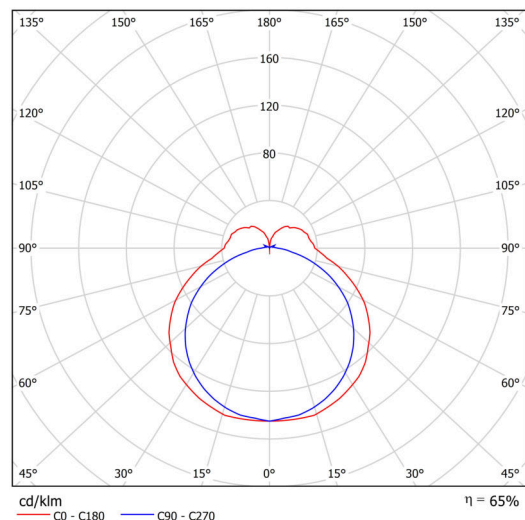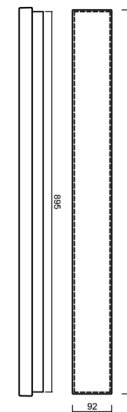

Eulum data for calculation programs are available at www.osmont.cz.

TECHNICAL SHEET



Logistic

EAN	8591728158972
Number of cartons	1 pcs

**The warranty for the batteries is valid for 12 months from the date of purchase.*

Installation dimensions:

