



## MATAR LE2

---

LED-1L78-1L79E400ZLEA09/PC72/L100 C DALI 3/35/4K##


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# MATAR LE2

Product code: MAT71615

Type: LED-1L78-1L79E400ZLEA09/PC72/L100 C DALI 3/35/4K##

Short description of the luminaire: Black colour | pendant LED light DALI | opal polycarbonate shade (PC)| steel wire pendant (SELV, cableless) 100 cm |

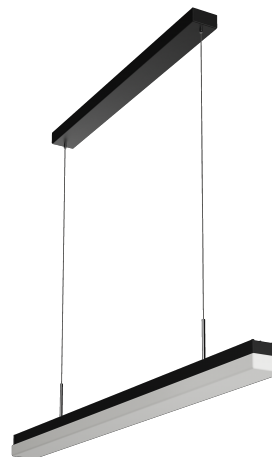

## Technical data



Types of luminaires	Dimmable
Mounting type	Suspended - SELV wire (cableless)
Base material	aluminium
Shade material	opal polycarbonate
Base color	black Ral9005
Shade color	white
Holding the shade	spring
Mounting location	ceiling
Width	905 mm
Length	58 mm
Height	46 mm
Suspension length	1000 mm
mounting holes (diameter)	2xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C

## Electrical data

Power consumption	15 W
Ingress Protection	IP40
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	39 pcs
Automatic circuit breaker type B16A	63 pcs
Automatic circuit breaker type C10A	63 pcs
Automatic circuit breaker type C16A	101 pcs
Switching current	7,9 A / 2,6 µsec
Number of LED drivers	1

## Luminous data

Lum. flux of luminaire	1740/1820 lm
Lum. flux of light source	2460/2560 lm
Luminaire efficacy	116 lm/W
Chromaticity temperature	3000/3500/4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

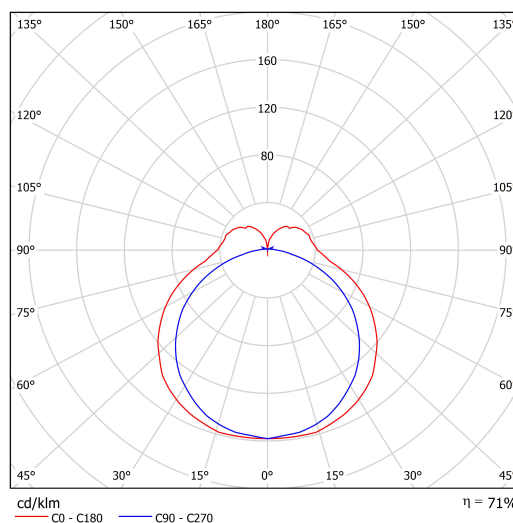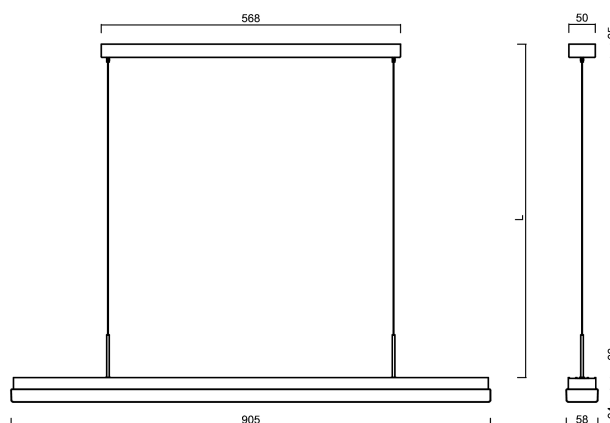

## TECHNICAL SHEET




Eulum data for calculation programs are available at  
[www.osmont.cz](http://www.osmont.cz).

### Logistical data

EAN	8591728231095
Warranty*	60 months

\*The warranty for the batteries is valid for 36 months from the date of purchase.

### Installation dimensions:

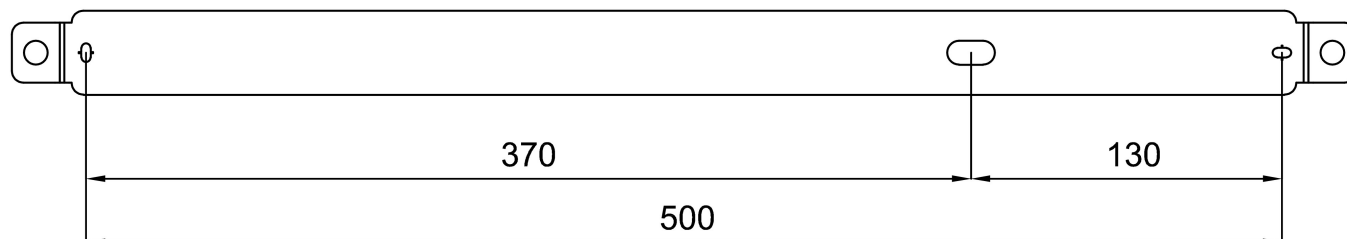

Additional assortment:

Lampshade

Product code	Name	Color	Picture	Drawing
20609	PC72	white		