



MATAR LE3

LED-2L79EMP700ZLEA12/PC73/L100 B 3/35/4K##

WWW.OSMONT.CZ

MATAR LE3

Product code: MAT71620

Type: LED-2L79EMP700ZLEA12/PC73/L100 B 3/35/4K##

Short description of the luminaire: White colour | pendant LED light ON/OFF | multipower driver | opal polycarbonate shade (PC)| steel wire pendant (SELV, cableless) 100 cm |



Technical data



Types of luminaires	Classic on/off
Mounting type	Suspended - SELV wire (cableless)
Base material	aluminium
Shade material	opal polycarbonate
Base color	white Ral9003
Shade color	white
Holding the shade	spring
Mounting location	ceiling
Width	1190 mm
Length	58 mm
Height	46 mm
Suspension length	1000 mm
mounting holes (diameter)	2xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C

Electrical data

Power consumption	26 W
Ingress Protection	IP40
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	37 pcs
Automatic circuit breaker type B16A	59 pcs
Automatic circuit breaker type C10A	37 pcs
Automatic circuit breaker type C16A	59 pcs
Number of LED drivers	1

Luminous data

Lum. flux of luminaire	2990/3120 lm
Lum. flux of light source	4210/4390 lm
Luminaire efficacy	115 lm/W
Chromaticity temperature	3000/3500/4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

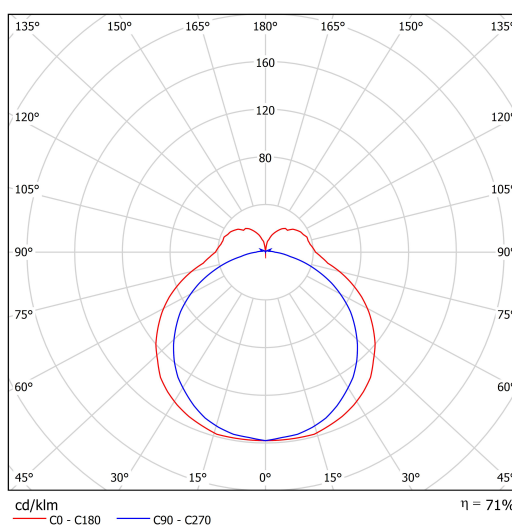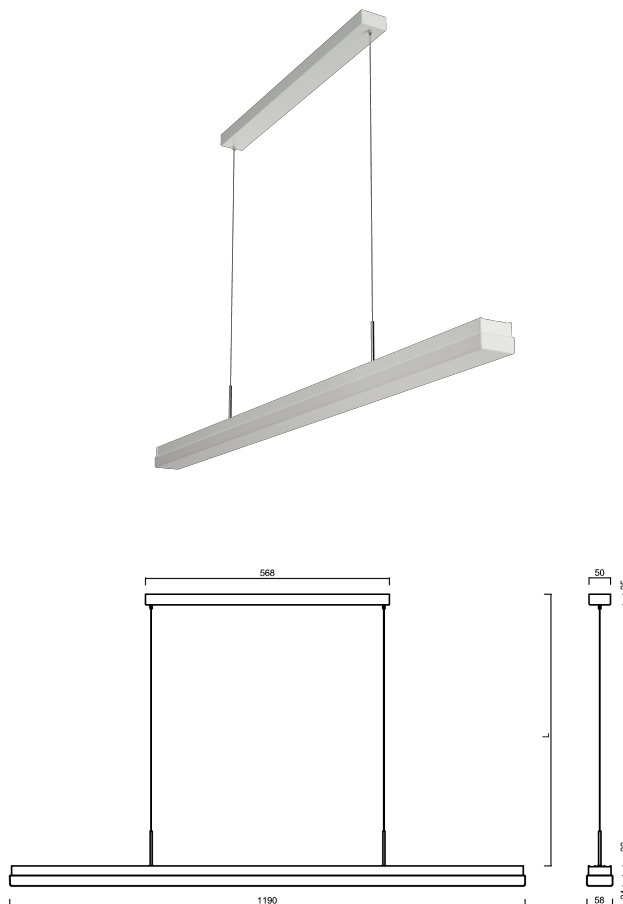

Eulum data for calculation programs are available at

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

Multipower

Possibility of output adjustment by the user (DIP switch on the current source).


I [mA]	700	650	600	550	500	450	400	
[%]	100	93	86	79	71	64	57	

Logistical data

EAN	8591728231149
Weight NTTO	2.08 Kg
Weight BTTO	2.45 Kg
Warranty*	60 months

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Installation dimensions:

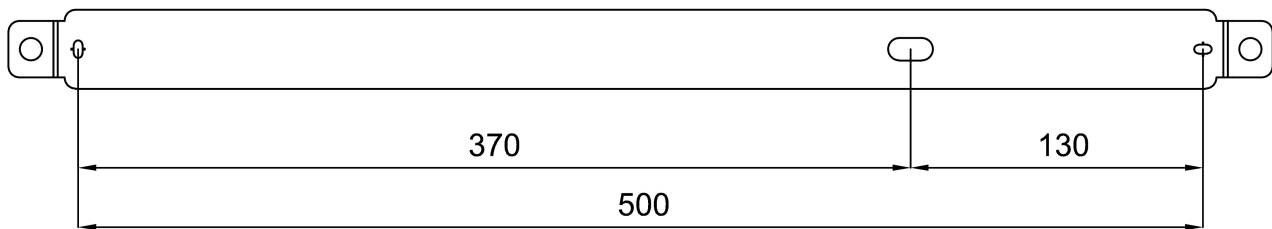

Additional assortment:

Lampshade

Product code	Name	Color	Picture	Drawing
20615	PC73	white	