

## MATAR LE3

---

LED-2L79E500ZLEA12/PC73/L100 C 3/35/4K##



[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# MATAR LE3

Product code: MAT71622

Type: LED-2L79E500ZLEA12/PC73/L100 C 3/35/4K##

Short description of the luminaire: Black colour | pendant LED light ON/OFF | opal polycarbonate shade (PC)| steel wire pendant (SELV, cableless) 100 cm |

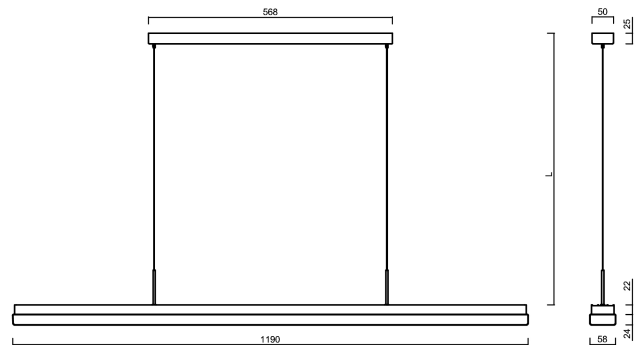

## Technical data


Types of luminaires	Classic on/off
Mounting type	Suspended - SELV wire (cableless)
Base material	aluminium
Shade material	opal polycarbonate
Base color	black Ral9005
Shade color	white
Holding the shade	spring
Mounting location	ceiling
Width	1190 mm
Length	58 mm
Height	46 mm
Suspension length	1000 mm
mounting holes (diameter)	2xØ5mm
Cable entrance	2xØ16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C

## Electrical data

Power consumption	18 W
Ingress Protection	IP40
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	37 pcs
Automatic circuit breaker type B16A	59 pcs
Automatic circuit breaker type C10A	37 pcs
Automatic circuit breaker type C16A	59 pcs
Number of LED drivers	1

## Luminous data

Lum. flux of luminaire	2180/2280 lm
Lum. flux of light source	3070/3210 lm
Luminaire efficacy	121 lm/W
Chromaticity temperature	3000/3500/4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

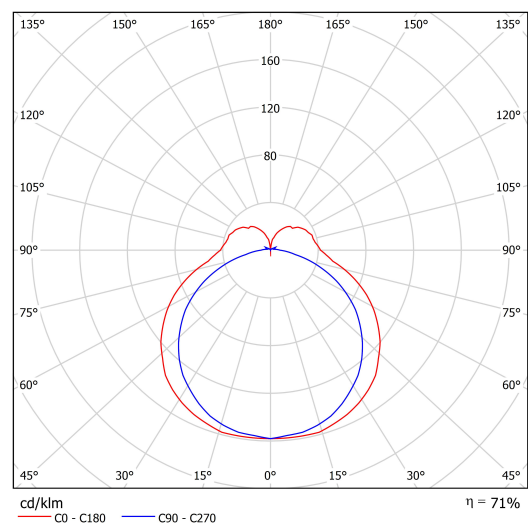

Eulum data for calculation programs are available at


OSMONT, s.r.o.  
HYBRÁLEC 129,  
586 01 JIHLAVA, CZ

## Logistical data

EAN	8591728231163
Weight NTTO	2.08 Kg
Weight BTTO	2.45 Kg
Warranty*	60 months

\*The warranty for the batteries is valid for 36 months from the date of purchase.

## Installation dimensions:

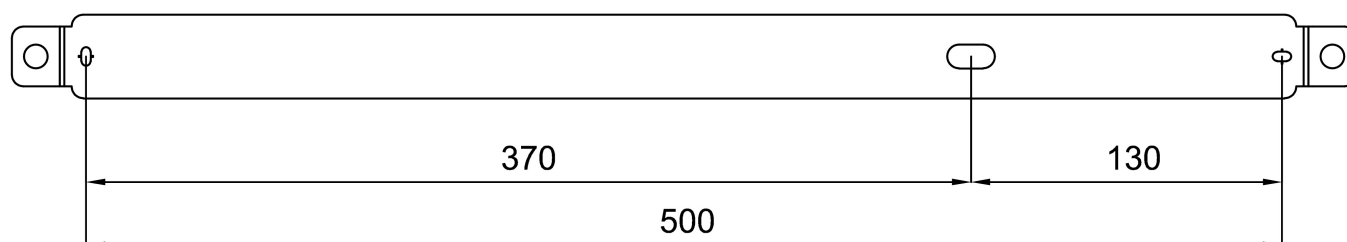

## Additional assortment:

## Lampshade

Product code	Name	Color	Picture	Drawing
20615	PC73	white	