



## TANIA P2

---

LED-5L07E900Z11/298/a1/NK1W NL 4K##


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# TANIA P2

Product code: TAN66995

Type: LED-5L07E900Z11/298/a1/NK1W NL 4K##

Short description of the luminaire: Stainless polished pendant LED light with emergency unit combined with TRIPLEX OPAL glass shade.

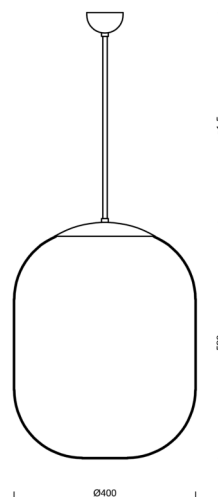

## Technical

|                              |                                |
|------------------------------|--------------------------------|
| Types of luminaires          | Emergency combined             |
| Mounting type                | Suspended - rod                |
| Base material                | stainless steel steel          |
| Shade material               | three-layer glass TRIPLEX OPAL |
| Base color                   | polished stainless steel       |
| Shade color                  | white                          |
| Holding the shade            | folding system                 |
| Mounting location            | ceiling                        |
| Width                        | 400 mm                         |
| Length                       | 400 mm                         |
| Height                       | 520 mm                         |
| Diameter                     | ø 400 mm                       |
| Hinge length                 | 200 mm                         |
| mounting holes (diameter)    | none                           |
| Installation wire (diameter) | none                           |
| Energy Class                 | D                              |
| Impact strength              | IK01                           |

## Electric

|                                     |           |
|-------------------------------------|-----------|
| Power consumption                   | 41 W      |
| Ingress Protection                  | IP40      |
| Socket                              | LED modul |
| Battery type                        | NiCd      |
| Emergency time                      | 3 hours   |
| terminal block                      | none      |
| Automatic circuit breaker type B10A | 25 pcs    |
| Automatic circuit breaker type B16A | 43 pcs    |
| Automatic circuit breaker type C10A | 29 pcs    |
| Automatic circuit breaker type C16A | 52 pcs    |

## Luminous

|                                             |              |
|---------------------------------------------|--------------|
| Lum. flux of luminaire                      | 6120 lm      |
| Lum. flux of light source                   | 6960 lm      |
| Lum. flux of light source in emergency mode | 150 lm       |
| Luminaire efficacy                          | 149 lm/W     |
| Temperature                                 | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI                                         | Ra80         |
| MacAdam                                     | 3            |



## TECHNICAL SHEET



|                   |              |
|-------------------|--------------|
| Blue light hazard | Risk group 0 |
|-------------------|--------------|

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

### Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728126483        |
| Weight NTTO       | 7.3 Kg               |
| Weight BTTO       | 9.1 Kg               |
| Number of cartons | 2 pcs                |
| Package volume    | 0.151 m <sup>3</sup> |
| Package 1 width   | 0.5 m                |
| Package 1 length  | 0.51 m               |
| Package 1 height  | 0.52 m               |
| Warranty*         | 60 months            |

\*The warranty for the batteries is valid for 12 months from the date of purchase.

### Additional assortment:

#### Lampshade

| Product code | Name | Color | Description | Picture                                                                               | Drawing |
|--------------|------|-------|-------------|---------------------------------------------------------------------------------------|---------|
| 20129        | 298  | white |             |  |         |