



## TILIA C3

---

LED-4L36E400NU4/PC34C DALI 4K##


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# TILIA C3

Product code: TIL69813


Type: LED-4L36E400NU4/PC34C DALI 4K##

Short description of the luminaire: White surface-mounted LED light DALI and polycarbonate shade.



## Technical

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	steel
Shade material	opal polycarbonate
Base color	white Ral9003
Shade color	white - black
Holding the shade	folding system
Mounting location	ceiling/wall
Width	550 mm
Length	550 mm
Height	70 mm
mounting holes (diameter)	4xØ5mm
Installation wire (diameter)	2xØ16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C

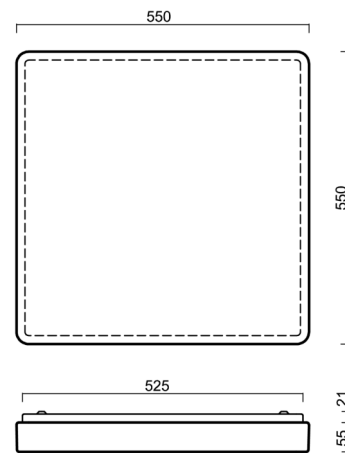


## Electric

Power consumption	40 W
Ingress Protection	IP54
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	9 pcs
Automatic circuit breaker type B16A	14 pcs
Automatic circuit breaker type C10A	15 pcs
Automatic circuit breaker type C16A	23 pcs

## Luminous

Lum. flux of luminaire	3730 lm
Lum. flux of light source	6790 lm
Luminaire efficacy	93 lm/W
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

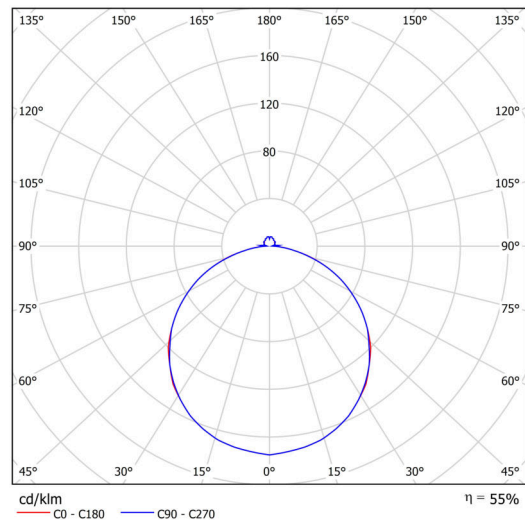


Logistic

EAN	8591728129521
Weight NTTO	3.6 Kg
Weight BTTO	4.3 Kg
Number of cartons	1 pcs
Package volume	0.031 m <sup>3</sup>
Package 1 width	0.56 m
Package 1 length	0.55 m
Package 1 height	0.1 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:

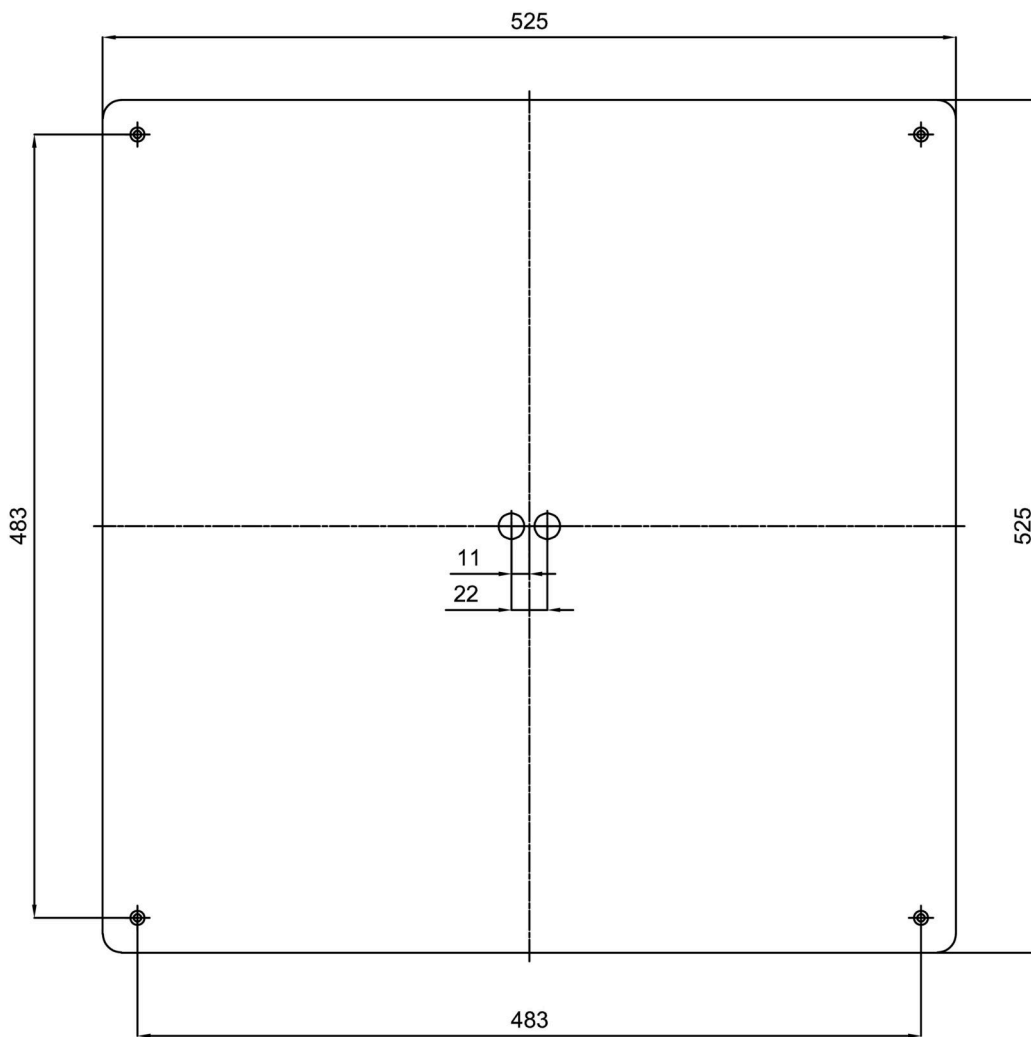

## Additional assortment:

## Lampshade

Product code	Name	Color	Description	Picture	Drawing
20579	PC34C	white - black		