



## TRITON 2

---

Private: LED-1L15EMP700/IN-184 NK3HST HF B 3K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# TRITON 2

Product code: TRI57301

Type: Private: LED-1L15EMP700/IN-184 NK3HST HF B 3K#



## Technical

Types of luminaires	Emergency combined + sensor
Mounting type	industrial
Base material	polycarbonate
Shade material	opal polycarbonate
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	360 mm
Length	360 mm
Height	108 mm
mounting holes (diameter)	3xØ5mm
Installation wire (diameter)	2xØ16mm
Impact strength	IK10




## Electric


Power consumption	27 W
Ingress Protection	IP65
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block

## Luminous

Lum. flux of luminaire	3310 lm
Lum. flux of light source	4040 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

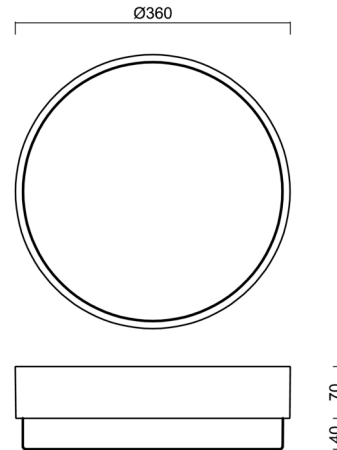

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

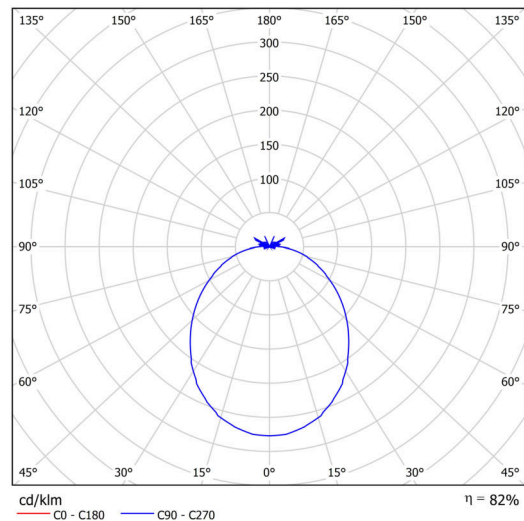

## Logistic

EAN	8591728160012
Number of cartons	1 pcs

## TECHNICAL SHEET

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*



### Installation dimensions:

