



## TRITON 2

---

Private: LED-1L15E500/IN-184 NK3HST HF B 4K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# TRITON 2


Product code: TRI57799

Type: Private: LED-1L15E500/IN-184 NK3HST HF B 4K#



## Technical

Types of luminaires	Emergency combined + sensor
Mounting type	industrial
Base material	polycarbonate
Shade material	opal polycarbonate
Base color	white Ral9003
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	360 mm
Length	360 mm
Height	108 mm
mounting holes (diameter)	3xØ5mm
Installation wire (diameter)	2xØ16mm
Energy Class	D
Impact strength	IK10

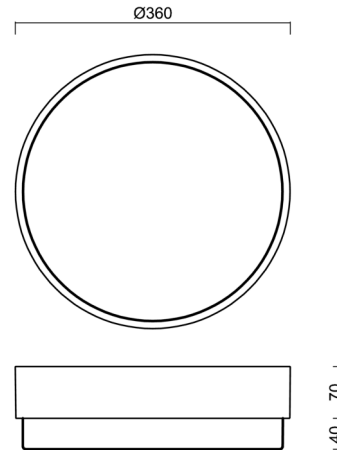


## Electric

Power consumption	19 W
Ingress Protection	IP65
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block

## Luminous

Lum. flux of luminaire	2570 lm
Lum. flux of light source	3130 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

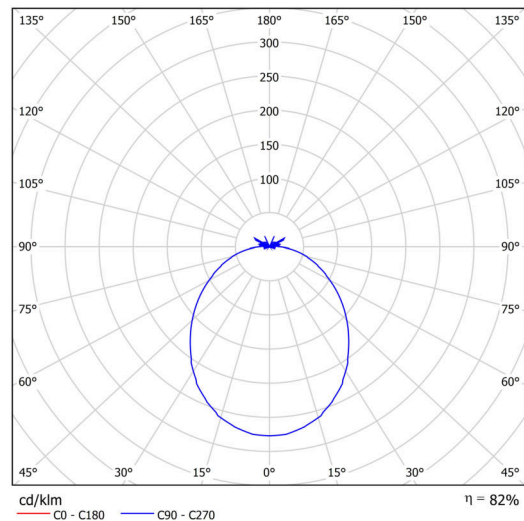

## Logistic

EAN	8591728160173
Number of cartons	1 pcs

## TECHNICAL SHEET

Warranty\*

60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

### Installation dimensions:

