



TRITON 2

Private: LED-1L15EMP700/IN-184 NK3HST HF C 4K#

WWW.OSMONT.CZ

TRITON 2

Product code: TRI57809

Type: Private: LED-1L15EMP700/IN-184 NK3HST HF C 4K#



Technical

Types of luminaires	Emergency combined + sensor
Mounting type	industrial
Base material	polycarbonate
Shade material	opal polycarbonate
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	360 mm
Length	360 mm
Height	108 mm
mounting holes (diameter)	3xØ5mm
Installation wire (diameter)	2xØ16mm
Impact strength	IK10





Electric

Power consumption	27 W
Ingress Protection	IP65
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
terminal block	snap terminal block

Luminous

Lum. flux of luminaire	3460 lm
Lum. flux of light source	4220 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

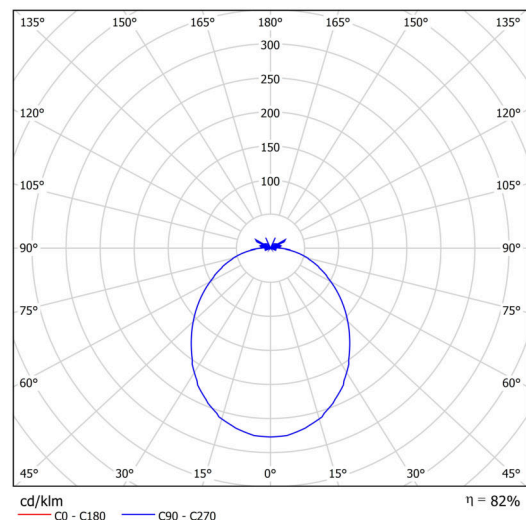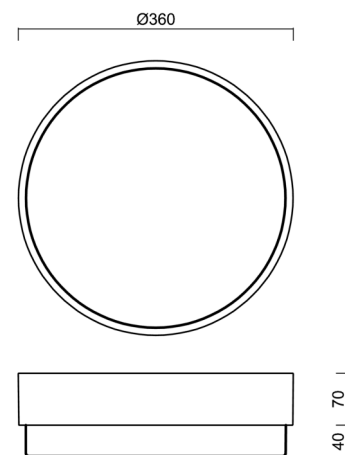

Eulum data for calculation programs are available at www.osmont.cz.

TECHNICAL SHEET



Logistic

EAN	8591728160272
Number of cartons	1 pcs

**The warranty for the batteries is valid for 12 months from the date of purchase.*

Installation dimensions:

