



## ZETA 2 PF

---

LED-3L65E1050K2H/PF92 C 4K##

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ZETA 2 PF

Product code: ZET60538


Type: LED-3L65E1050K2H/PF92 C 4K##

Short description of the luminaire: Black color | surface-mounted LED light | ON/OFF | indirect lighting version | PMMA matt shade



## Technical

|                              |                              |
|------------------------------|------------------------------|
| Types of luminaires          | Classic on/off               |
| Mounting type                | surface mounted              |
| Base material                | steel                        |
| Shade material               | opal polymethyl methacrylate |
| Base color                   | black Ral9005                |
| Shade color                  | white - black                |
| Mounting location            | ceiling/wall                 |
| Width                        | 600 mm                       |
| Length                       | 600 mm                       |
| Height                       | 105 mm                       |
| Diameter                     | ø 600 mm                     |
| mounting holes (diameter)    | 3xø5mm                       |
| Installation wire (diameter) | 2xø16mm                      |
| Energy Class                 | C                            |
| Operating temperature        | from -20°C to +30°C          |

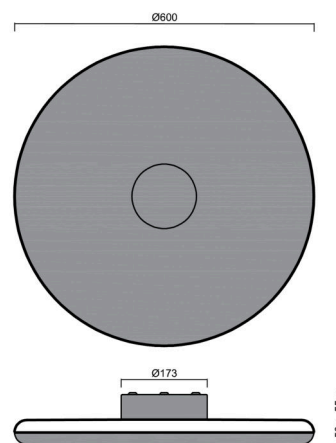


## Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 38 W                |
| Ingress Protection                  | IP40                |
| Socket                              | LED modul           |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 14 pcs              |
| Automatic circuit breaker type B16A | 22 pcs              |
| Automatic circuit breaker type C10A | 23 pcs              |
| Automatic circuit breaker type C16A | 36 pcs              |

## Luminous

|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 4650 lm      |
| Lum. flux of light source   | 6650 lm      |
| Luminaire efficacy          | 122 lm/W     |
| Temperature                 | 4000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

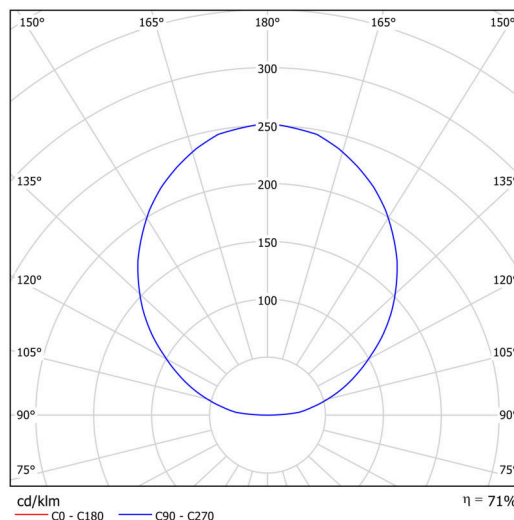

Logistic

|             |               |
|-------------|---------------|
| EAN         | 8591728091613 |
| Weight NTTO | 5.5 Kg        |
| Weight BTTO | 6.3 Kg        |
| Warranty*   | 60 months     |


\*The warranty for the batteries is valid for 12 months from the date of purchase.

Installation dimensions:



## Additional assortment:

## Lampshade

| Product code | Name | Color | Description | Picture  | Drawing |
|--------------|------|-------|-------------|--|---------|
| 20669        | PM92 | white |             |  |         |