



## ADRIA L3

---

LED-5L06E600ZL11/096/L100 NK3HST MS 3K#


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ADRIA L3

Product code: ADR62342

Type: LED-5L06E600ZL11/096/L100 NK3HST MS 3K#

Short description of the luminaire: Brass polished | pendant LED light with emergency backup combined ( with Self-test) | TRIPLEX OPAL hand blown glass shade| steel wire pendant ( with supply cable) 100 cm |

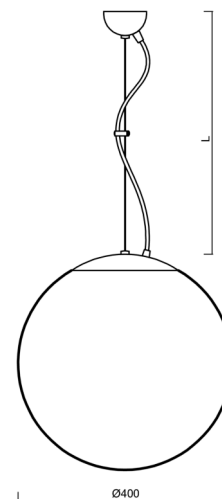

## Technical

Types of luminaires	Emergency combined SELFTEST
Mounting type	Suspended - wire
Base material	brass
Shade material	three-layer glass TRIPLEX OPAL
Base color	polished brass
Shade color	white
Holding the shade	folding system
Mounting location	ceiling
Width	400 mm
Length	400 mm
Height	400 mm
Hinge length	1000 mm
mounting holes (diameter)	none
Cable entrance	none
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C

## Electric

Power consumption	27 W
Ingress Protection	IP40
Socket	LED modul
Battery type	LiFePO4
Emergency time	3 hours
SELFTEST	yes
terminal block	none

## Luminous

Lum. flux of luminaire	3910 lm
Lum. flux of light source	4440 lm
Lum. flux of light source in emergency mode	200 lm
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0



Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

Logistic

EAN	8591728146979
Weight NTTO	5.4 Kg
Weight BTTO	6.13 Kg
Number of cartons	2 pcs
Package volume	0.072 m <sup>3</sup>
Package 1 width	0.405 m
Package 1 length	0.405 m
Package 1 height	0.41 m
Warranty*	60 months

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

Additional assortment:

Lampshade

Product code	Name	Color	Description	Picture	Drawing
20040	096	white	příslušenství	