



## ADRIA L3

---

LED-5L06E600ZL11/096/L100/NK1W MS 3K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ADRIA L3

Product code: ADR68334


Type: LED-5L06E600ZL11/096/L100/NK1W MS 3K#

Short description of the luminaire: Brass pendant LED light with emergency unit combined with TRIPLEX OPAL glass shade.



## Technical

Types of luminaires	Emergency combined
Mounting type	Suspended - wire
Base material	brass
Shade material	three-layer glass TRIPLEX OPAL
Base color	polished brass
Shade color	white
Holding the shade	folding system
Mounting location	ceiling
Width	400 mm
Length	400 mm
Height	400 mm
Diameter	ø 400 mm
Hinge length	1000 mm
mounting holes (diameter)	none
Installation wire (diameter)	none
Energy Class	D
Impact strength	IK01
Operating temperature	from 0°C to +30°C

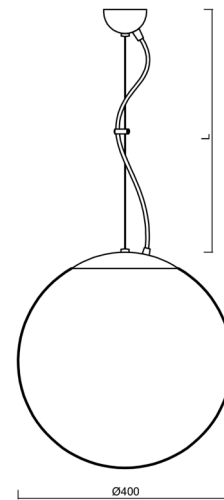

## Electric

Power consumption	27 W
Ingress Protection	IP40
Socket	LED modul
Battery type	LiFePO4
Emergency time	1 hours
terminal block	none
Automatic circuit breaker type B10A	23 pcs
Automatic circuit breaker type B16A	36 pcs
Automatic circuit breaker type C10A	40 pcs
Automatic circuit breaker type C16A	64 pcs

## Luminous

Lum. flux of luminaire	3910 lm
Lum. flux of light source	4440 lm
Lum. flux of light source in emergency mode	170 lm
Luminaire efficacy	144 lm/W
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3



## TECHNICAL SHEET



Blue light hazard	Risk group 0
-------------------	--------------

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

### Logistic

EAN	8591728060619
Weight NTTO	5.4 Kg
Weight BTTO	6.13 Kg
Number of cartons	2 pcs
Package volume	0.072 m <sup>3</sup>
Package 1 width	0.405 m
Package 1 length	0.405 m
Package 1 height	0.41 m
Warranty*	60 months

\*The warranty for the batteries is valid for 12 months from the date of purchase.

### Additional assortment:

#### Lampshade

Product code	Name	Color	Description	Picture	Drawing
20040	096	white		