



## ADRIA P3

---

LED-5L06E600Z11/096/a4 NK3HST MS 4K#


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ADRIA P3

Product code: ADR62753

Type: LED-5L06E600Z11/096/a4 NK3HST MS 4K#

Short description of the luminaire: Brass polished | pendant LED light with emergency backup combined ( with Self-test) | TRIPLEX OPAL hand blown glass shade| rod pendant 80 cm |

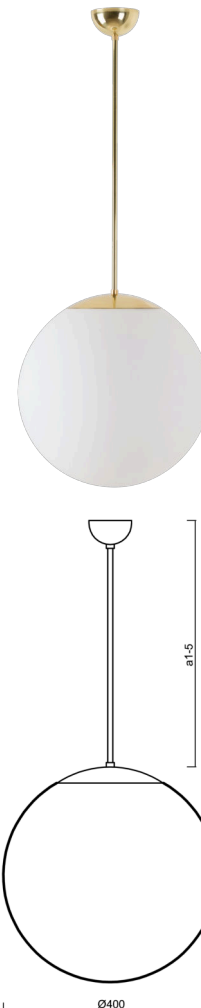

## Technical

|                           |                                |
|---------------------------|--------------------------------|
| Types of luminaires       | Emergency combined SELFTEST    |
| Mounting type             | Suspended - rod                |
| Base material             | brass                          |
| Shade material            | three-layer glass TRIPLEX OPAL |
| Base color                | polished brass                 |
| Shade color               | white                          |
| Holding the shade         | folding system                 |
| Mounting location         | ceiling                        |
| Width                     | 400 mm                         |
| Length                    | 400 mm                         |
| Height                    | 400 mm                         |
| Hinge length              | 800 mm                         |
| mounting holes (diameter) | none                           |
| Cable entrance            | none                           |
| Energy Class              | D                              |
| Impact strength           | IK01                           |
| Operating temperature     | from -20°C to +30°C            |

## Electric

|                    |           |
|--------------------|-----------|
| Power consumption  | 27 W      |
| Ingress Protection | IP40      |
| Socket             | LED modul |
| Battery type       | LiFePO4   |
| Emergency time     | 3 hours   |
| SELFTEST           | yes       |
| terminal block     | none      |

## Luminous

|                                             |              |
|---------------------------------------------|--------------|
| Lum. flux of luminaire                      | 4070 lm      |
| Lum. flux of light source                   | 4630 lm      |
| Lum. flux of light source in emergency mode | 200 lm       |
| Temperature                                 | 4000 K       |
| Rated life time LED L80/B10                 | 100000 hours |
| CRI                                         | Ra80         |
| MacAdam                                     | 3            |
| Blue light hazard                           | Risk group 0 |

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).




Logistic

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728147488        |
| Weight NTTO       | 6.15 Kg              |
| Weight BTTO       | 7.25 Kg              |
| Number of cartons | 2 pcs                |
| Package volume    | 0.081 m <sup>3</sup> |
| Package 1 width   | 0.405 m              |
| Package 1 length  | 0.405 m              |
| Package 1 height  | 0.41 m               |
| Warranty*         | 60 months            |

*\*The warranty for the batteries is valid for 12 months from the date of purchase.*

Additional assortment:

Lampshade

| Product code | Name | Color | Description   | Picture                                                                              | Drawing |
|--------------|------|-------|---------------|--------------------------------------------------------------------------------------|---------|
| 20040        | 096  | white | příslušenství |  |         |